

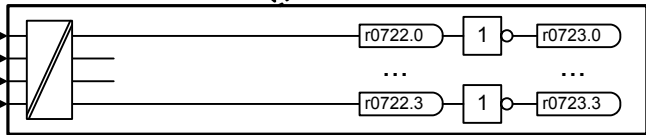

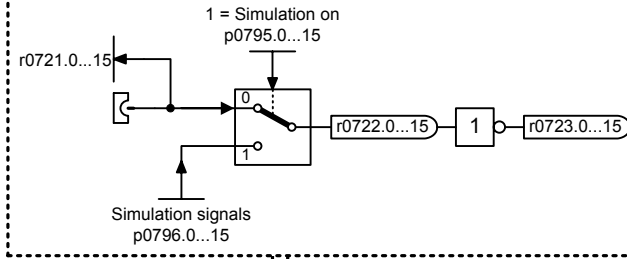


Simulation for DI 0...DI 15

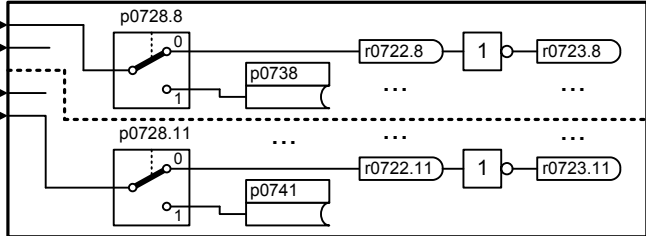



4 digital inputs, electrically isolated

[2120]





4 digital inputs/outputs, bidirectional

[2130]

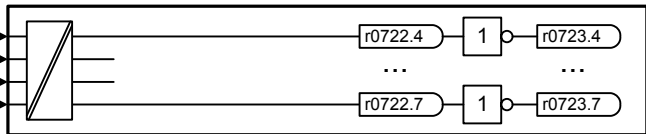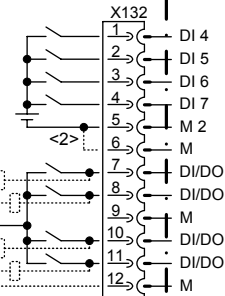

4 digital inputs, electrically isolated

[2121]

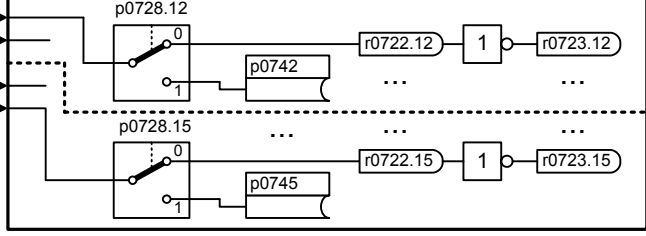

4 digital inputs/outputs, bidirectional

[2132]

<1> For SERVO and VECTOR, the following applies:
Fast measuring probe inputs.
<2> Jumper open, electrical isolation for DI 0...3 and DI 4...7

1

2

3

4

5

6

7

8

DO: CU_GL, CU_GM, CU_S

fp_1510_51_eng.vsd

Function diagram

Overviews - CU320 input/output terminals

08.03.07 V02.05.00

SINAMICS