


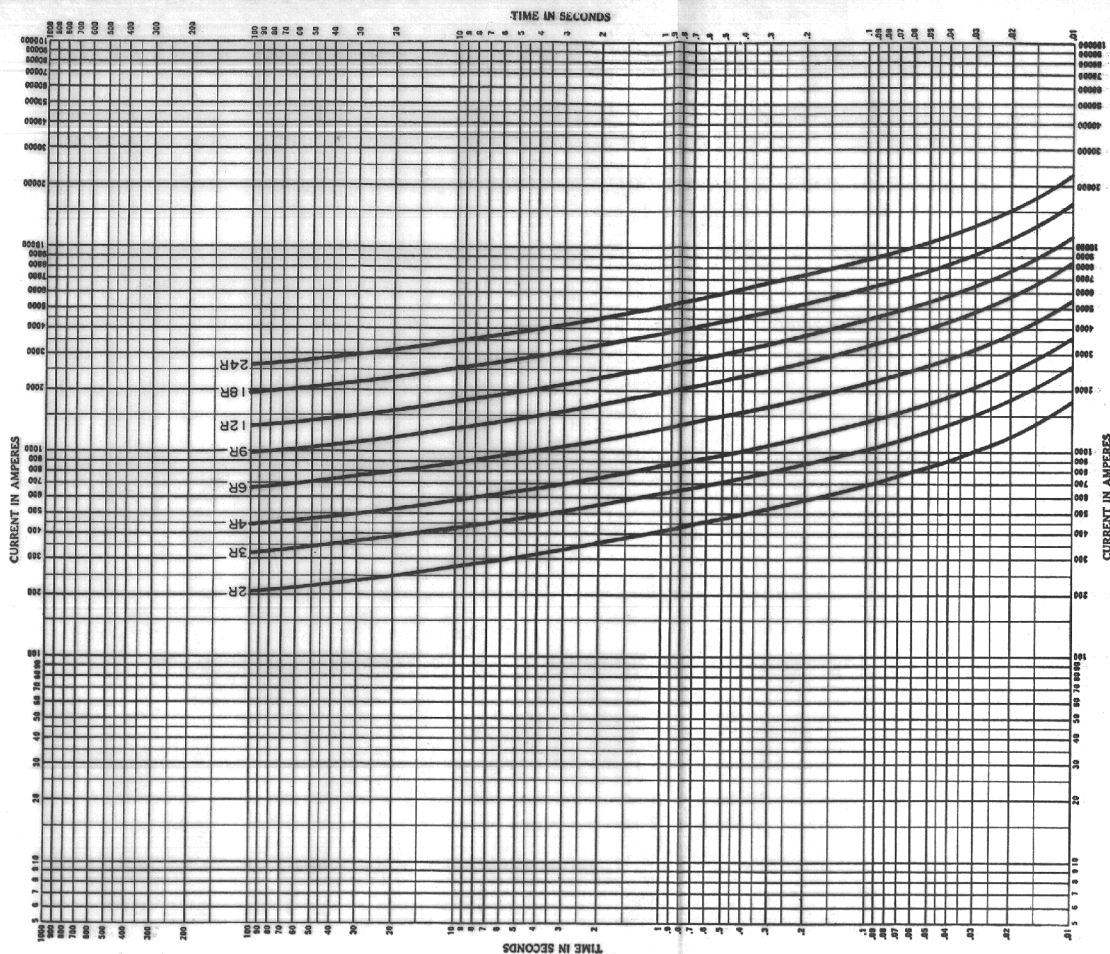

E1-2 & E10-2 SIZES D & DD 2400 & 4800 VOLTS

For Types E1-2 and E10-2, Current-Limiting Time-Current Characteristic Curves

Basis for Data: Standard 1.5 Second Arcing Time-Current Characteristic Curves

1. Tests made at 2,750 Volts, 5500 Volts at Low

2. Curves are plotted to Maximum

Test points so variations should be

3. When the fuse is the protected device, the minimum melting time is of interest;

in a co-ordination scheme.