

INSTRUCTION MANUAL

FOR

VOLTAGE REGULATOR

Model: VR485-100-P

Part Number: 9 2482 00 108



Publication Number: 9 2482 00 992

Revision: A 03/98

INTRODUCTION

This manual provides information concerning the operation and installation of a VR485-100-P Voltage Regulator. To accomplish this, the following is provided.

- Specifications
- Installation
- Operation
- Maintenance

WARNING

TO AVOID PERSONAL INJURY OR EQUIPMENT DAMAGE, ONLY QUALIFIED PERSONNEL SHOULD PERFORM THE PROCEDURES PRESENTED IN THIS MANUAL.

First Printing: November 1991

Printed in USA

© 1998 Basler Electric Co., Highland, IL 62249

March 1998

CONFIDENTIAL INFORMATION

OF BASLER ELECTRIC COMPANY, HIGHLAND, IL. IT IS LOANED FOR CONFIDENTIAL USE, SUBJECT TO RETURN ON REQUEST, AND WITH THE MUTUAL UNDERSTANDING THAT IT WILL NOT BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF BASLER ELECTRIC COMPANY.

It is not the intention of this manual to cover all details and variations in equipment, nor does this manual provide data for every possible contingency regarding installation or operation. The availability and design of all features and options are subject to modification without notice. Should further information be required, contact Basler Electric Company, Highland, Illinois.

**BASLER ELECTRIC
ROUTE 143, BOX 269
HIGHLAND, IL 62249 USA**

<http://www.basler.com>, info@basler.com

PHONE 618-654-2341

FAX 618-654-2351

CONTENTS

SECTION 1	GENERAL INFORMATION	1-1
	DESCRIPTION.....	1-1
	SPECIFICATIONS	1-1
	ACCESSORY ITEMS.....	1-2
	Power Isolation Transformer	1-2
	Paralleling CT	1-2
SECTION 2	INSTALLATION.....	2-1
	MOUNTING	2-1
	INTERCONNECTION	2-1
SECTION 3	OPERATION.....	3-1
	GENERAL	3-1
	PRELIMINARY SET-UP.....	3-1
	OPERATION AT REDUCED SPEEDS.....	3-1
	SYSTEM START-UP	3-1
	ADJUSTMENTS.....	3-1
	Field Flashing	3-1
	Underfrequency Threshold Adjustment.....	3-2
	Stability Adjustment	3-2
	Voltage Adjustment	3-2
	Droop Adjustment.....	3-2
SECTION 4	MAINTENANCE.....	4-1
	PREVENTIVE MAINTENANCE	4-1
	TROUBLESHOOTING	4-1
SECTION 5	MANUAL CHANGE INFORMATION	5-1
	CHANGES	5-1

SECTION 1 • GENERAL INFORMATION

GENERAL DESCRIPTION

The VR485-100-P Voltage Regulator controls the output voltage of 400 Hz brushless generators by supplying the required exciter field current. The VR485-100-P includes circuitry for paralleling, underfrequency limiting, and excitation current limiting.

SPECIFICATIONS

Refer to Table 1-1 for the electrical specifications and to Table 1-2 for the physical specifications of the VR485-100-P Voltage Regulator.

Table 1-1. Electrical Specifications

Dc Output Power:	2.5 Adc at 63 Vdc (157.5 W) maximum continuous. 3.6 Adc at 90 Vdc (324 W) forcing one minute.
Exciter Field Dc Resistance:	25 ohms, minimum.
Ac Power Input:	320 Vac, center-tapped, 400 Hz (special transformer). 20 Vac, 400 Hz (special transformer).
Sensing Input:	208 Vrms $\pm 10\%$, single phase, 400 Hz.
Sensing Burden:	2 VA.
Voltage Adjust Range:	187 - 229 Vac.
Regulation Accuracy:	Better than $\pm 1.0\%$ no load to full load.
Temperature Stability:	1.0% maximum for a 60°F change in ambient temperature.
Response Time:	Less than 1.5 cycles.
Frequency Compensation:	Approximately 0.66 V/Hz below 380 Hz.
Excitation Current Limit:	5 Adc.
Paralleling CT Input:	1 A ac at full load.
Paralleling CT Burden:	2 VA (Basler Part Number BE 23571-002).
Voltage Build-Up:	Provides a minimum of 6 Vdc to the exciter field for voltage build-up with as little as 10 Vac (residual) on the power transformer primary.
Power Dissipation:	40 Watts maximum.

Table 1-2. Physical Specifications

Operating Temperature:	-32°C (-26°F) to +60°C (+140°F).
Storage Temperature:	-40°C (-40°F) to +85°C (+185°F).
Weight:	4.0 lb. (1.2 kg) Net.

ACCESSORY ITEMS

Power Isolation Transformer

A special power isolation transformer is required to operate the VR485-100-P. The transformer (Basler Part Number BE 25089-001) has a center-tapped, 320 Vac winding for the main Voltage Regulator exciter power and a 20 Vac winding for supplying low voltage power to the internal regulator circuitry.

Paralleling CT

A current transformer (Basler Part Number BE 23571-002) is required to supply line current information to the Paralleling circuit. The CT turns-ratio should be such that 1 A is supplied from the CT secondary when the generator is at full load. The CT should be rated for 2 VA minimum at 400 Hz.

SECTION 2 • INSTALLATION

MOUNTING

For optimum cooling of the regulator, it is recommended that the regulator be mounted vertically. Refer to the outline drawing, Figure 2-1.

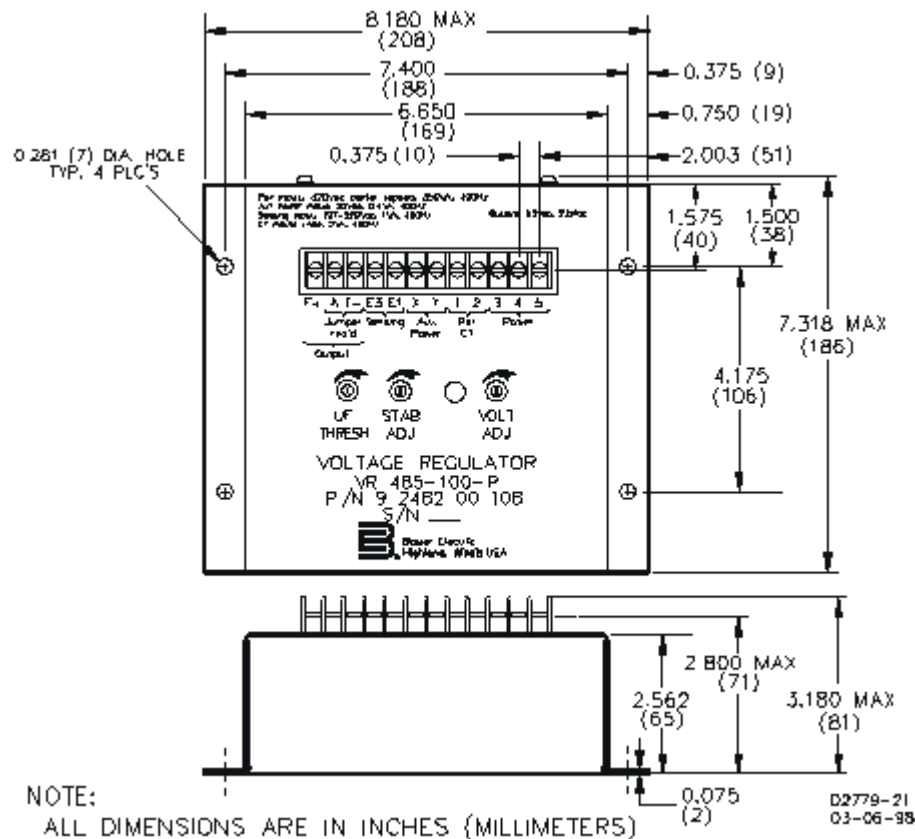


Figure 2-1. Outline Drawing

INTERCONNECTION

- The voltage regulator interconnection is provided by Figure 2-2.
- If an external voltage adjust rheostat is to be used, connect it between the generator $A\phi$, and terminal E1 as shown in Figure 2-2. If an external voltage adjust rheostat is not to be used, connect terminal E1 directly to the generator $A\phi$ line.
- Connect the exciter field terminals to F+ and F- while observing polarity. Be sure to connect terminal F- to terminal A as damage will result if these two terminals are not connected together.
- A flashing source may be required (refer to *Field Flashing* in Section 3). If it is, connect it as shown in Figure 2-2.
- Install fuses and a shutdown switch.

SECTION 3 • OPERATION

GENERAL

The following system operation procedures provide instructions for adjusting the VR485-100-P voltage regulator. Symptoms resulting from a faulty regulator and certain generator system problems are included, together with suggested remedies.

Complete the following steps before proceeding with the system start-up.

CAUTION

Meggers and high potential test equipment must not be used. Incorrect use of such equipment could damage the semiconductors contained in the regulator.

PRELIMINARY SET-UP

- a. Verify that the voltage regulator specifications conform with the generator system requirements.
- b. Ensure the voltage regulator is correctly connected to the generator system.

OPERATION AT REDUCED SPEEDS

During periods of prime mover idling, use the excitation shutdown switch to remove power from the voltage regulator.

SYSTEM START-UP

- a. Perform preliminary set-up as described previously.

NOTE

All voltage readings are to be taken with an average reading voltmeter.

- b. Start prime mover and bring up to rated speed.

RESULT: Voltage should build up. If not, proceed to *Field Flashing*.

- c. Slowly adjust the regulator **VAR** CW until the generator output voltage reaches the nominal value. If used, adjust the remote **VAR** to set the generator voltage to the exact value desired.

RESULT: Voltage should build up to rated value. If voltage does not build up to rated value, check generator for short or excessive load. If necessary, perform field flashing.

- d. Check regulator under normal operating and loading conditions.

RESULT: Voltage regulation should be better than $\pm 1.0\%$ no-load to full-load. If regulation is not within this range:

1) Voltage reduction under load may be due to speed change from no load to full load, causing the frequency compensation (V/Hz) circuit to reduce voltage at lower frequencies.

2) Replace voltage regulator if the prime mover speed is not changing.

ADJUSTMENTS

Field Flashing

The VR485-100-P will provide at least 6 Vdc to the exciter field for voltage build-up if at least 10 Vac residual voltage is present at the Power Transformer primary. If 6 Vdc to the exciter field is not sufficient for voltage build-up, or if 10 Vac is not available at the Power Transformer primary, it may be necessary to

add a flashing circuit as shown in Figure 2-2. The flashing voltage source should be sufficient to cause the generator output to be between 50% and 75% of the nominal no-load voltage. Care should be taken to avoid applying excessive flashing voltage as damage may result. If the available dc voltage source is too high, a series limiting resistor is required.

Underfrequency Threshold Adjustment

The underfrequency threshold is factory preset at 380 Hz. If a different threshold is desired, perform the following procedure:

- (1) Bring the prime mover/generator up to rated speed and voltage.
- (2) Adjust the **UF THRESH** Adjustment fully counter-clockwise (CCW).
- (3) Adjust the Prime Mover speed to the desired underfrequency threshold (corner frequency).
- (4) Slowly adjust the **UF THRESH** Adjustment clockwise (CW) until the generator voltage just starts to decrease.
- (5) Bring the Prime Mover speed up to rated speed. The voltage should return to nominal.

Stability Adjustment

If a stability setting is desired that provides the fastest possible voltage response with good generator stability, an oscilloscope or other voltage recording device should be used.

- (1) Rotation of the **STAB ADJ** control clockwise (CW) will slow response time.
- (2) Rotation of the **STAB ADJ** control counter-clockwise (CCW) will speed response time. If this control is rotated too far CCW, the generator voltage may oscillate (hunt).
- (3) Rotate the **STAB ADJ** control CW just past the point where oscillation occurred.

Voltage Adjustment

- (1) Adjustment of the generator output voltage may be accomplished by using either an external 20 kW potentiometer or the front panel **VOLT ADJ** control. With either potentiometer set near its center of rotation, the other potentiometer will provide a $\pm 10\%$ adjustment of the generator output voltage (nominal is 208 V).
- (2) If the external control is not used, the 20 kW potentiometer may be replaced with a jumper between terminal E1 and the generator A ϕ line. However, this will lower the overall voltage adjust range of the front panel **VOLT ADJ** control.
- (3) If a higher range of adjustment is required than the standard $\pm 10\%$, the external 20 kW potentiometer may be replaced with a 10 kW, 1/2 W, fixed resistor connected from terminal E1 to the generator A ϕ line.

Droop Adjustment

With proper selection of the Paralleling CT Turns-Ratio to deliver 1 A secondary current at full-load, the Paralleling Circuit can be adjusted by means of an external droop resistor (refer to Figure 2-2) from 0% to 5% droop of nominal voltage. To set the droop, proceed as follows:

- (1) Rotate the Droop potentiometer fully counter-clockwise (CCW).
- (2) Start the Prime Mover/Generator and adjust for rated voltage.
- (3) Apply full rated load at rated power factor to the generator.
- (4) Slowly adjust the Droop potentiometer clockwise (CW) until the desired amount of droop is attained.

SECTION 4 • MAINTENANCE

PREVENTIVE MAINTENANCE

A periodic inspection of the unit should be made to ensure that it is kept clean and free from accumulations of dust and moisture. Ensure that all the wire connections to the voltage regulator are clean, secure, and properly insulated.

TROUBLESHOOTING

In case of failure/defective operation of the unit, the following table (Table 4-1) is provided to aid in the determination of the cause and the possible solution.

Table 4-1. Troubleshooting

Symptom	Possible Cause	Remedy
Voltage does not build up.	a. No voltage or incorrect voltage to power input at terminals 3, 4 and 5 .	a. Flash field. b. Verify wiring. c. Check fuses. d. Check shutdown switch. e. Replace regulator.
	b. Overexcitation circuit is shutting off regulator.	Shutdown prime mover then restart. Watch for high voltage.
Voltage does not build up to rated value.	a. Internal or external voltage adjustments are improperly set.	Adjust front panel VOLT control and/or external voltage adjust rheostat.
	b. Prime mover speed too slow.	Verify speed and correct as necessary.
	c. Underfrequency roll-off point set too low.	Adjust UF THRESH front panel adjustment.
	d. Faulty regulator.	Replace regulator.
Voltage high and uncontrollable.	a. No sensing input.	Verify wiring.
	b. Faulty regulator.	Replace regulator.
Generator response too slow or hunting.	a. Improper front panel STAB adjustment.	Re-adjust front panel STAB adjustment.
	b. Faulty regulator.	Replace regulator.
Poor regulation.	a. Field requirements not matched to regulator capability or regulator output rating too low for generator requirements.	Verify specifications.
	b. Underfrequency set too high.	Check underfrequency adjustment.
	c. Low prime mover speed.	Verify prime mover speed.

SECTION 5 • MANUAL CHANGE INFORMATION

CHANGES

Substantive changes in this manual to date are summarized in Table 5-1.

Table 5-1. Summary of Changes

Revision	Summary of Changes	ECA No.	Date
A	Added "Basler Part Number BE 23571-002" reference to the CT in Table 1-1, <i>Paralleling CT Burden</i> , and on page 1-2 in <i>Paralleling CT</i> paragraph. Changed the format of the manual. Added Section 5 • Manual Change Information.	16637	03/98