


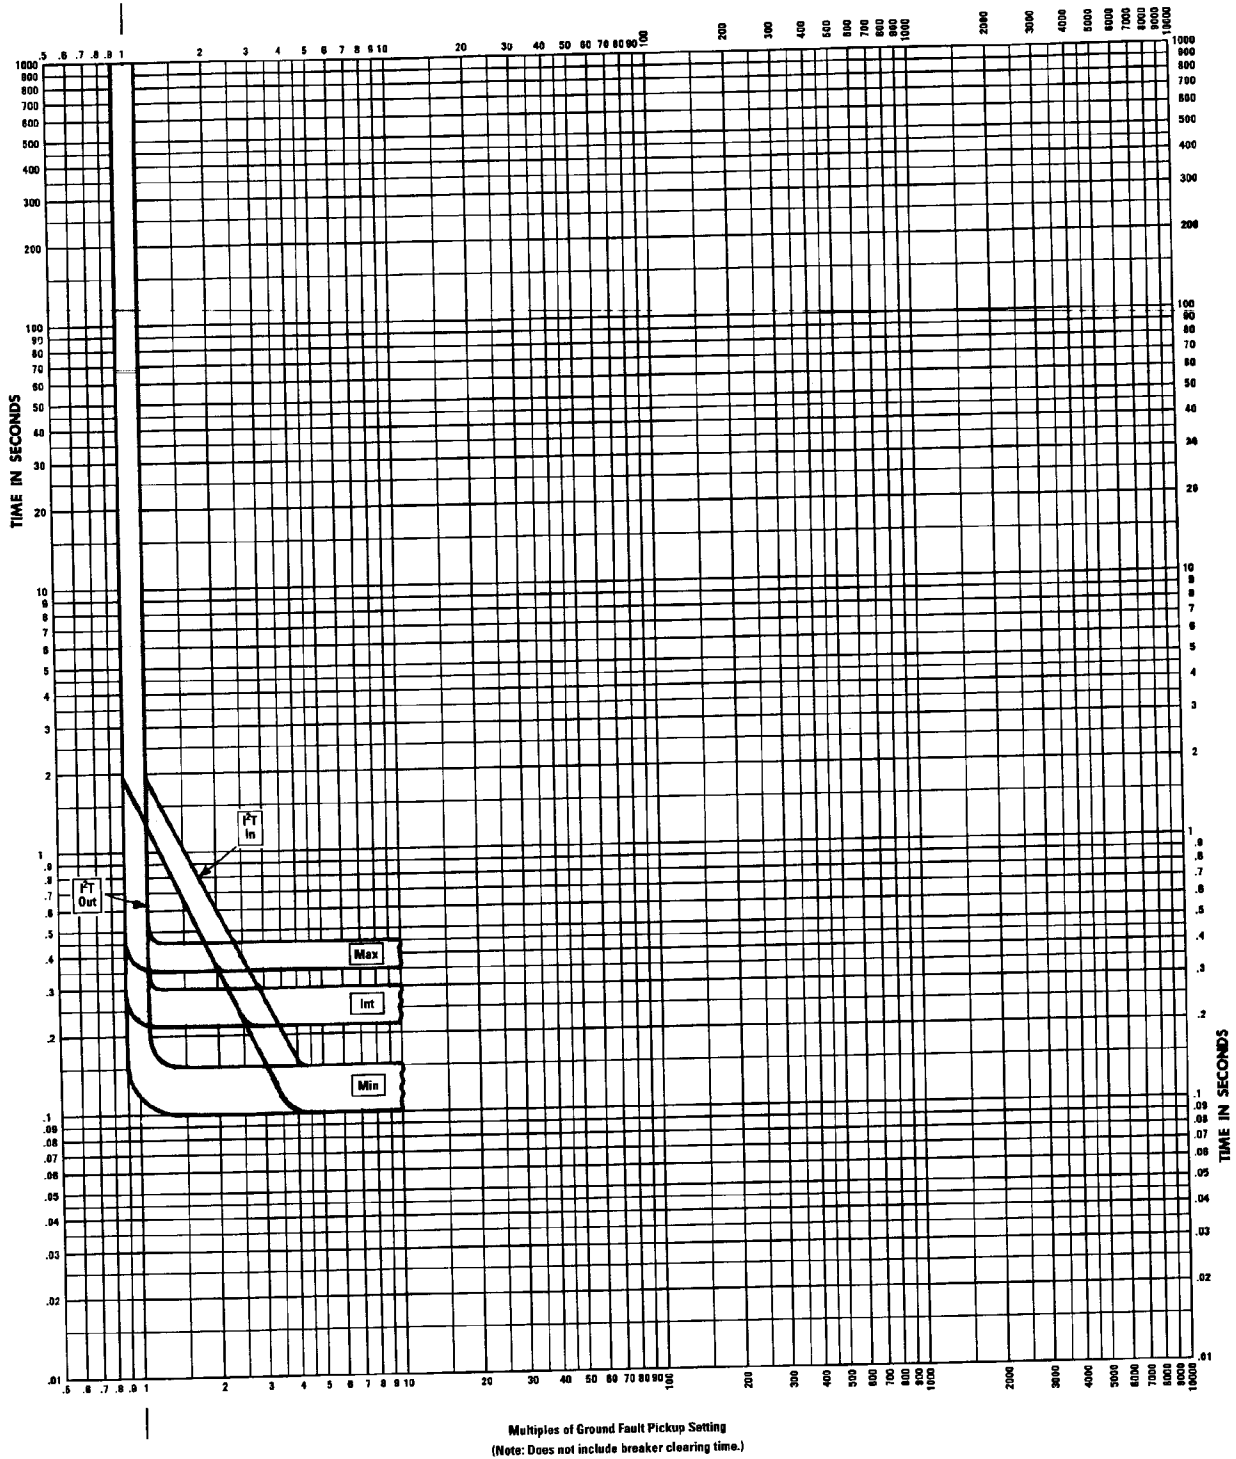

GE Industrial Systems

Available Ratings (Amperes)

Breaker		Current Sensor(s)
Model	Frame	
GE I-T-E® Allis Chalmers, or Westinghouse	225A	150, 225
	600A	150, 225, 600
	800A	150, 400, 800
	1600A	800, 1600
	2000A	2000
	3000A	3000
	4000A	4000

Voltage Rating: 600 volts ac, maximum

**Low Voltage Power Circuit Breakers
Conversion Kits
With Pro Trip™
Digital RMS Trip Units**

Ground Fault Time-Current Curves

- Curves apply at 60 Hertz and from -20°C to +55°C breaker ambient.

Note: Operation above 60 Hertz requires thermal and interrupting derating of the circuit breaker.

DES-006

Adjustments

Ground Fault function:

- Pick up settings are in multiples of Current Sensor Rating (S)
 - For (S) = 150 thru 2000 amps
Pickup setting 0.20 to 0.60 in 0.05 increments
 - For (S) = 3000 thru 3200 amps
Pickup setting 0.20 to 0.37 in 0.05 increments
 - For (S) = 4000 amps
Pickup setting 0.20 to 0.30 in 0.05 increments
- Delay Bands: Min, Int, Max 1 1/2 In, 1 1/2 Out

Settings Glossary

S = Current Sensor Rating in amps