

Aluminum and Copper Lugs

Bornes de alimentación y cuerpo múltiples

Bornes de répartition AL / CU

Item: TC3MG500

TA3MG500

TA2MG750

3TA2MG750

3TA3MG500

For Use With Frame MG, NG

Para Usar Con Caja Base MG, NG







Installation Instructions / Instructivo de Instalación

	⚠ Danger	⚠ Peligro	⚠ Danger
	Hazardous Voltage. Will cause death or serious injury. Turn off and lock out all power supplying this device before working on this device. Replace all covers before power supplying this device is turned on.	Tensión peligrosa. Puede causar la muerte o lesiones graves. Desenergice totalmente antes de instalar o darle servicio. Reemplace todas las barreras y cubiertas antes de energizar el interruptor.	Tension dangereuse. Danger de mort ou risque de blessures graves. Couper l'alimentation de l'appareil et barrer avant de travailler. Remplacez tous les couverts avant que l'alprovisionnement de pouvoir soit alimenté.


Use only with Siemens certified Components.

Utilizar únicamente con componentes certificados de Siemens.


A utiliser uniquement avec les composants certifiés Siemens.

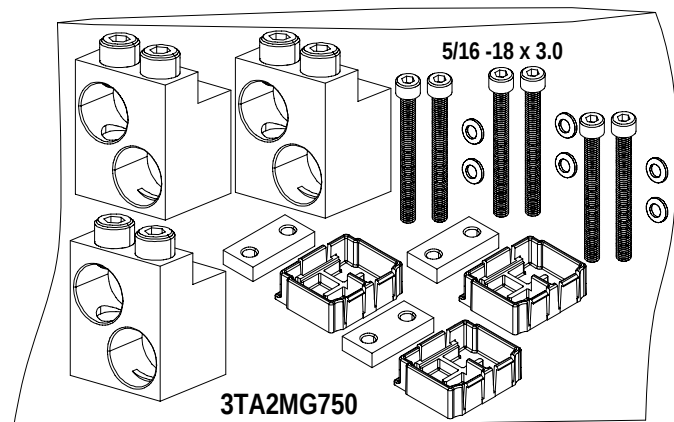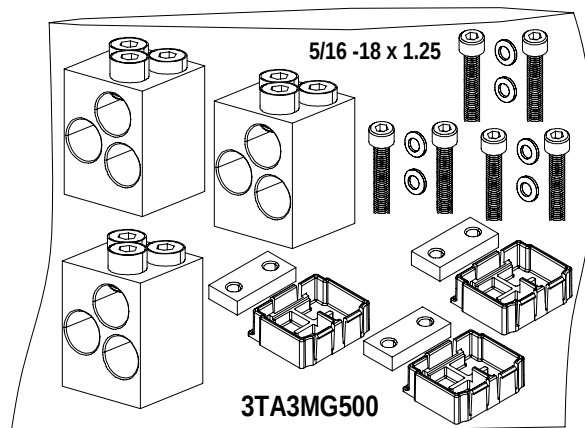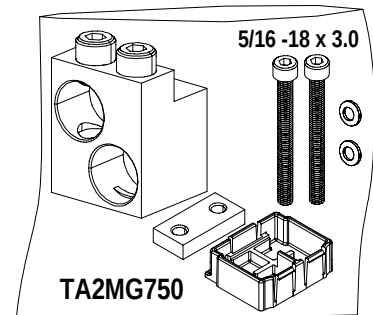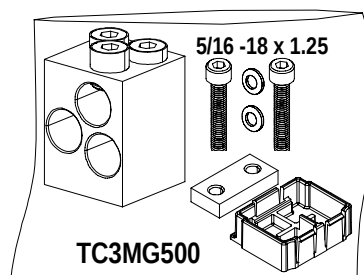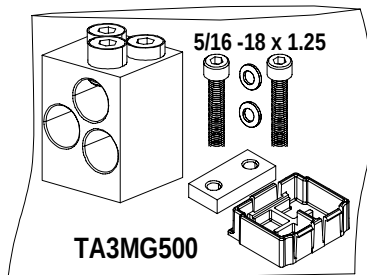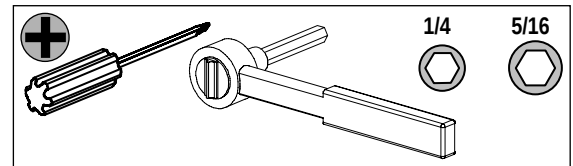


1

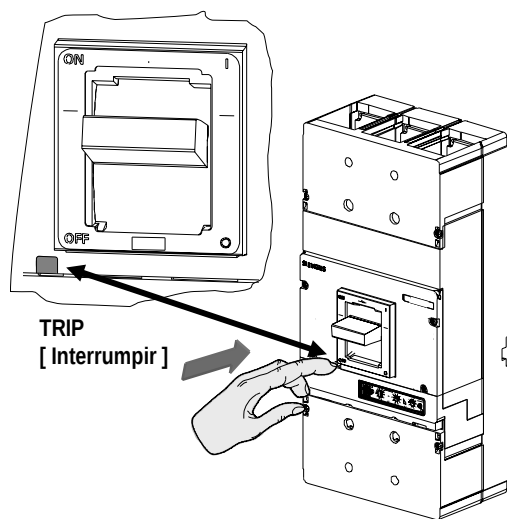


2

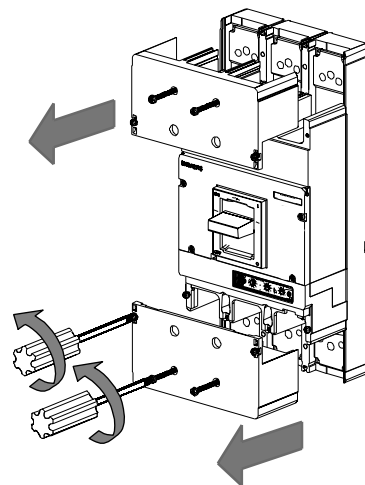




3

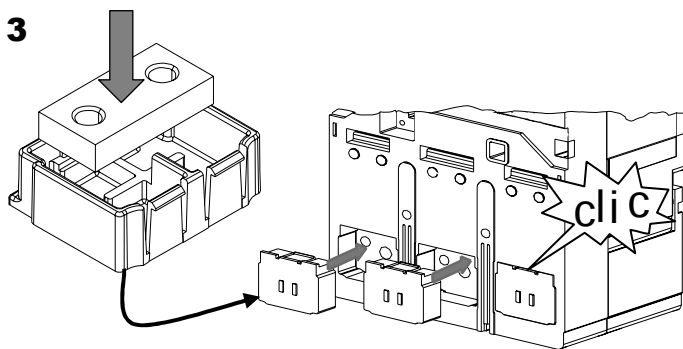


4

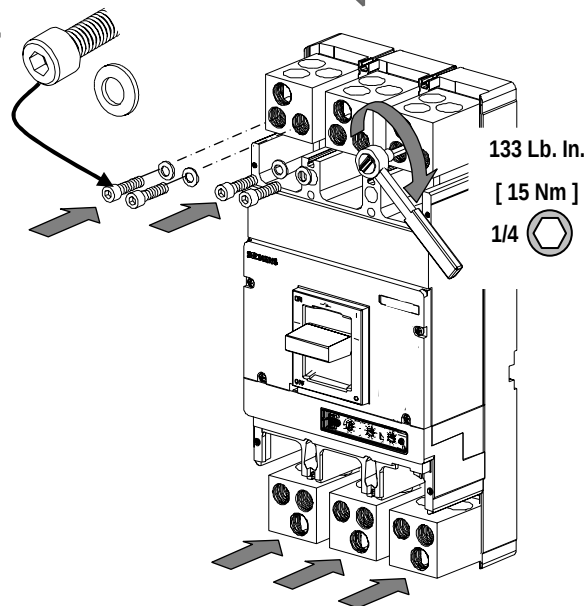

5

Wire Connector [Conexión del cable]	Wire Size [Rango Cable]	Ref. UL 486A - 486B Wire Stranding (Cable)		Torque [esfuerzo de torsión]	Wire Strip Length [Quitar]	
		CU / AL Class B	CU Class C		(A)	(B)
 TC3MG500	(Cu Only) 1 / 0 – 4 / 0 kcmil [42.4 – 107.2mm ²]	37	19	375.3 Lb. in. [42.4 Nm]	1.0" [23mm]	2.0" [48mm]
	(Cu Only) 250 – 500 kcmil [127 – 253mm ²]	37	61			
 TA3MG500 3TA3MG500	(Cu Only) 1 / 0 – 4 / 0 kcmil [42.4 – 107.2mm ²]	37	19	375.3 Lb. in. [42.4 Nm]	1.0" [23mm]	2.0" [48mm]
	(Cu Only) 250 – 500 kcmil [127 – 253mm ²]	37	61			
 TA2MG750 3TA2MG750	(Cu / Al) 500 kcmil [253mm ²]	37	19	375.3 Lb. in. [42.4 Nm]	1.0" [22.5mm]	---
	(Cu / Al) 600 – 750 kcmil [304 – 380mm ²]	61	91			

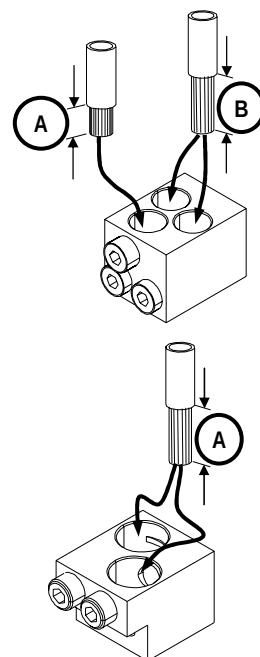



Danger

Hazardous Voltage.
Will cause death or serious injury.

Turn off and lock out all power supplying this device before working on this device.
Replace all covers before power supplying this device is turned on.



Peligro

Tensión peligrosa.
Puede causar la muerte o lesiones graves.


Desenergice totalmente antes de instalar o darle servicio.
Reemplace todas las barreras y cubiertas antes de energizar el interruptor.

Danger


Tension dangereuse.
Danger de mort ou risque de blessures graves.

Couper l'alimentation de l'appareil et barrer avant de travailler.
Remplacez tous les couverts avant que l'approvisionnement de pouvoir soit alimenté.


6

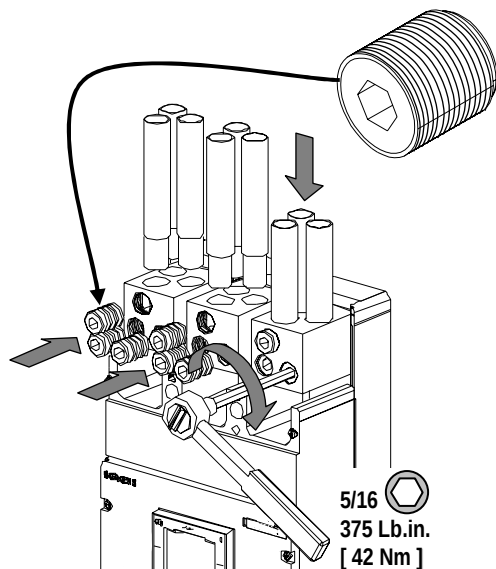

7

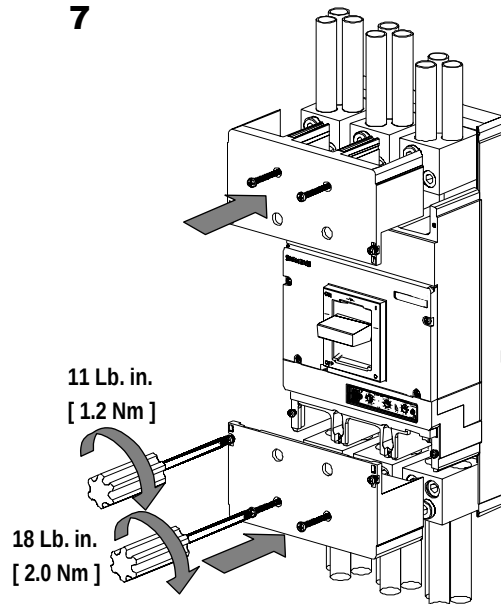

8

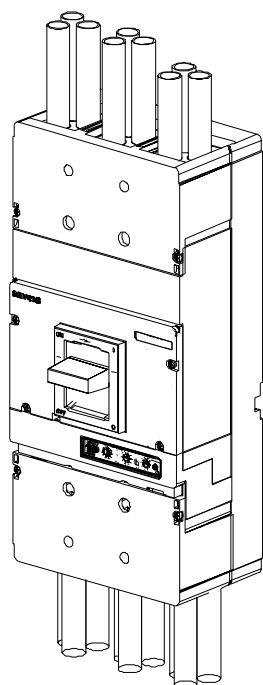

Technical Support:

Toll Free: 1-800-964-4114

Internet: www.sea.siemens.com

Subject to change without prior notice
Siemens Energy & Automation Inc. , Alpharetta, GA U.S.A.

3 / 3

© Siemens Energy & Automation Inc. 2004
806876A00