


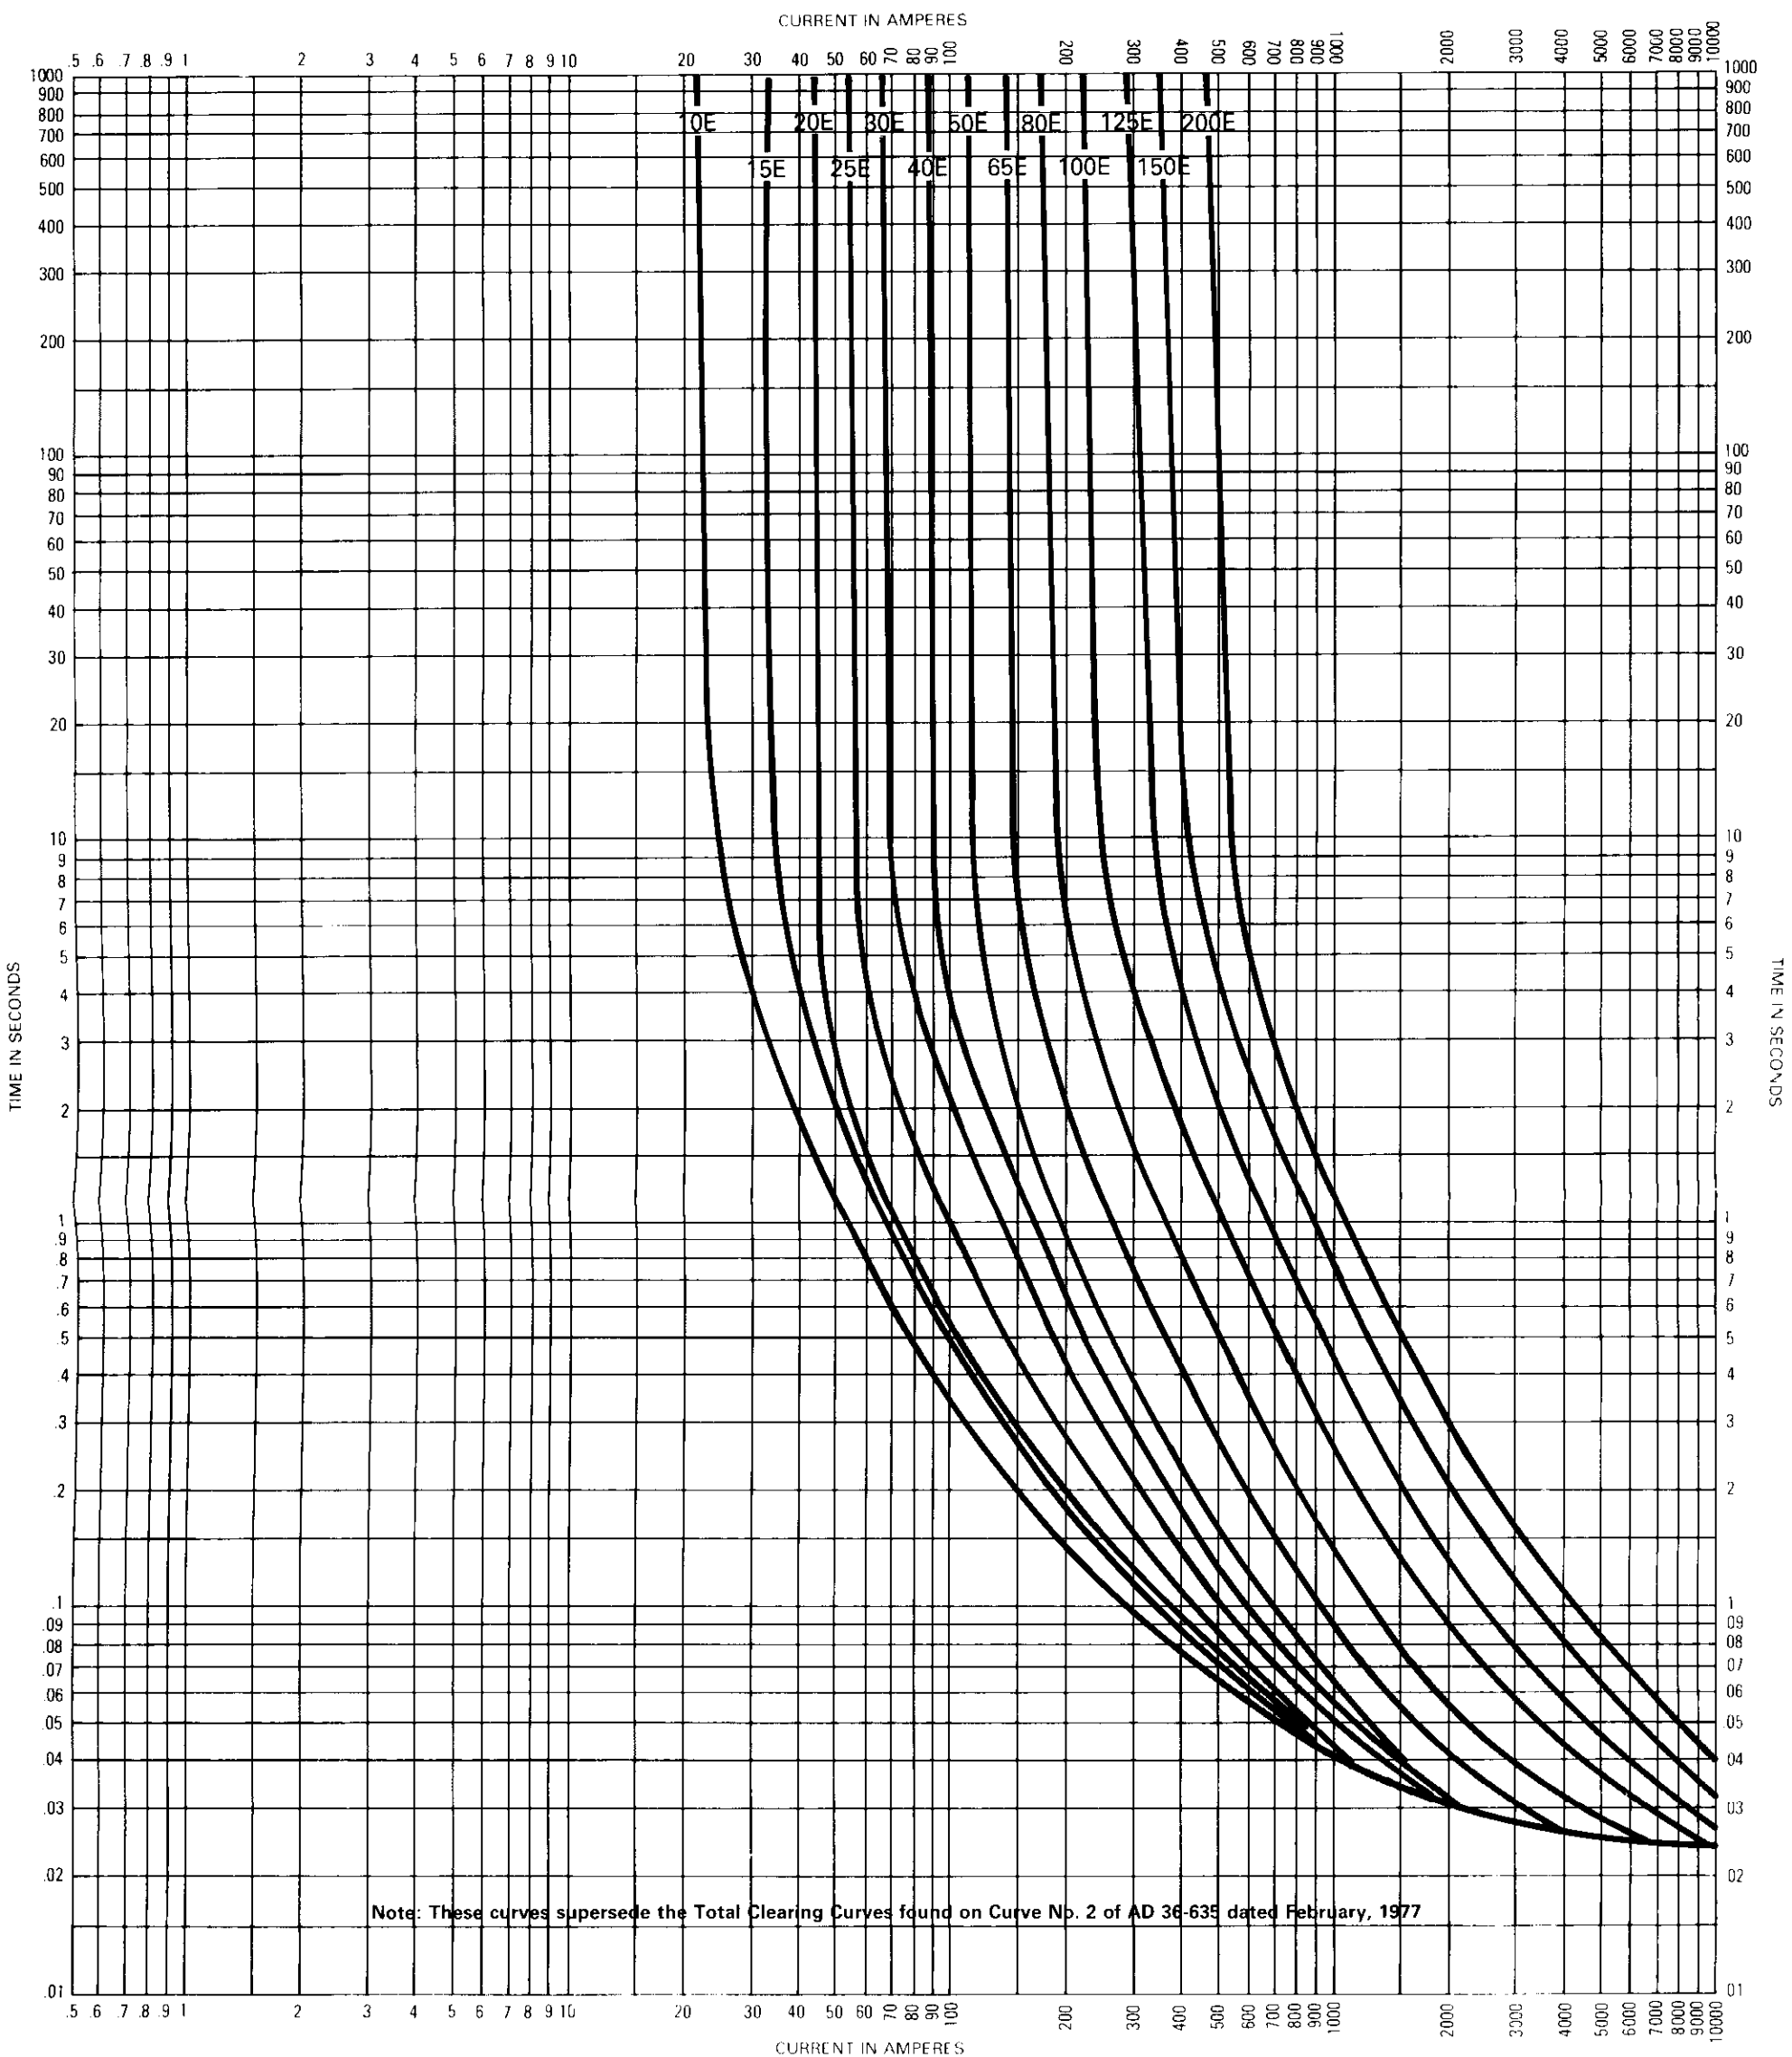

Type RBA-RDB-200 Refill Power Fuses • Standard Speed Refills
Total Clearing Time-Current Characteristics – 2.4 to 34.5 Kv

Curves are based on tests starting with fuse unit at an ambient temperature of 25°C and without initial load. Curves are plotted to maximum test points so variations should be negative.

Westinghouse Electric Corporation
Distribution and Control Business Unit
5 Parkway Center
Greentree, PA 15220
Printed in USA

Curve No. 2
Supersedes Curve No. 2
dated January, 1986
Reference No. 667014
September, 1986