


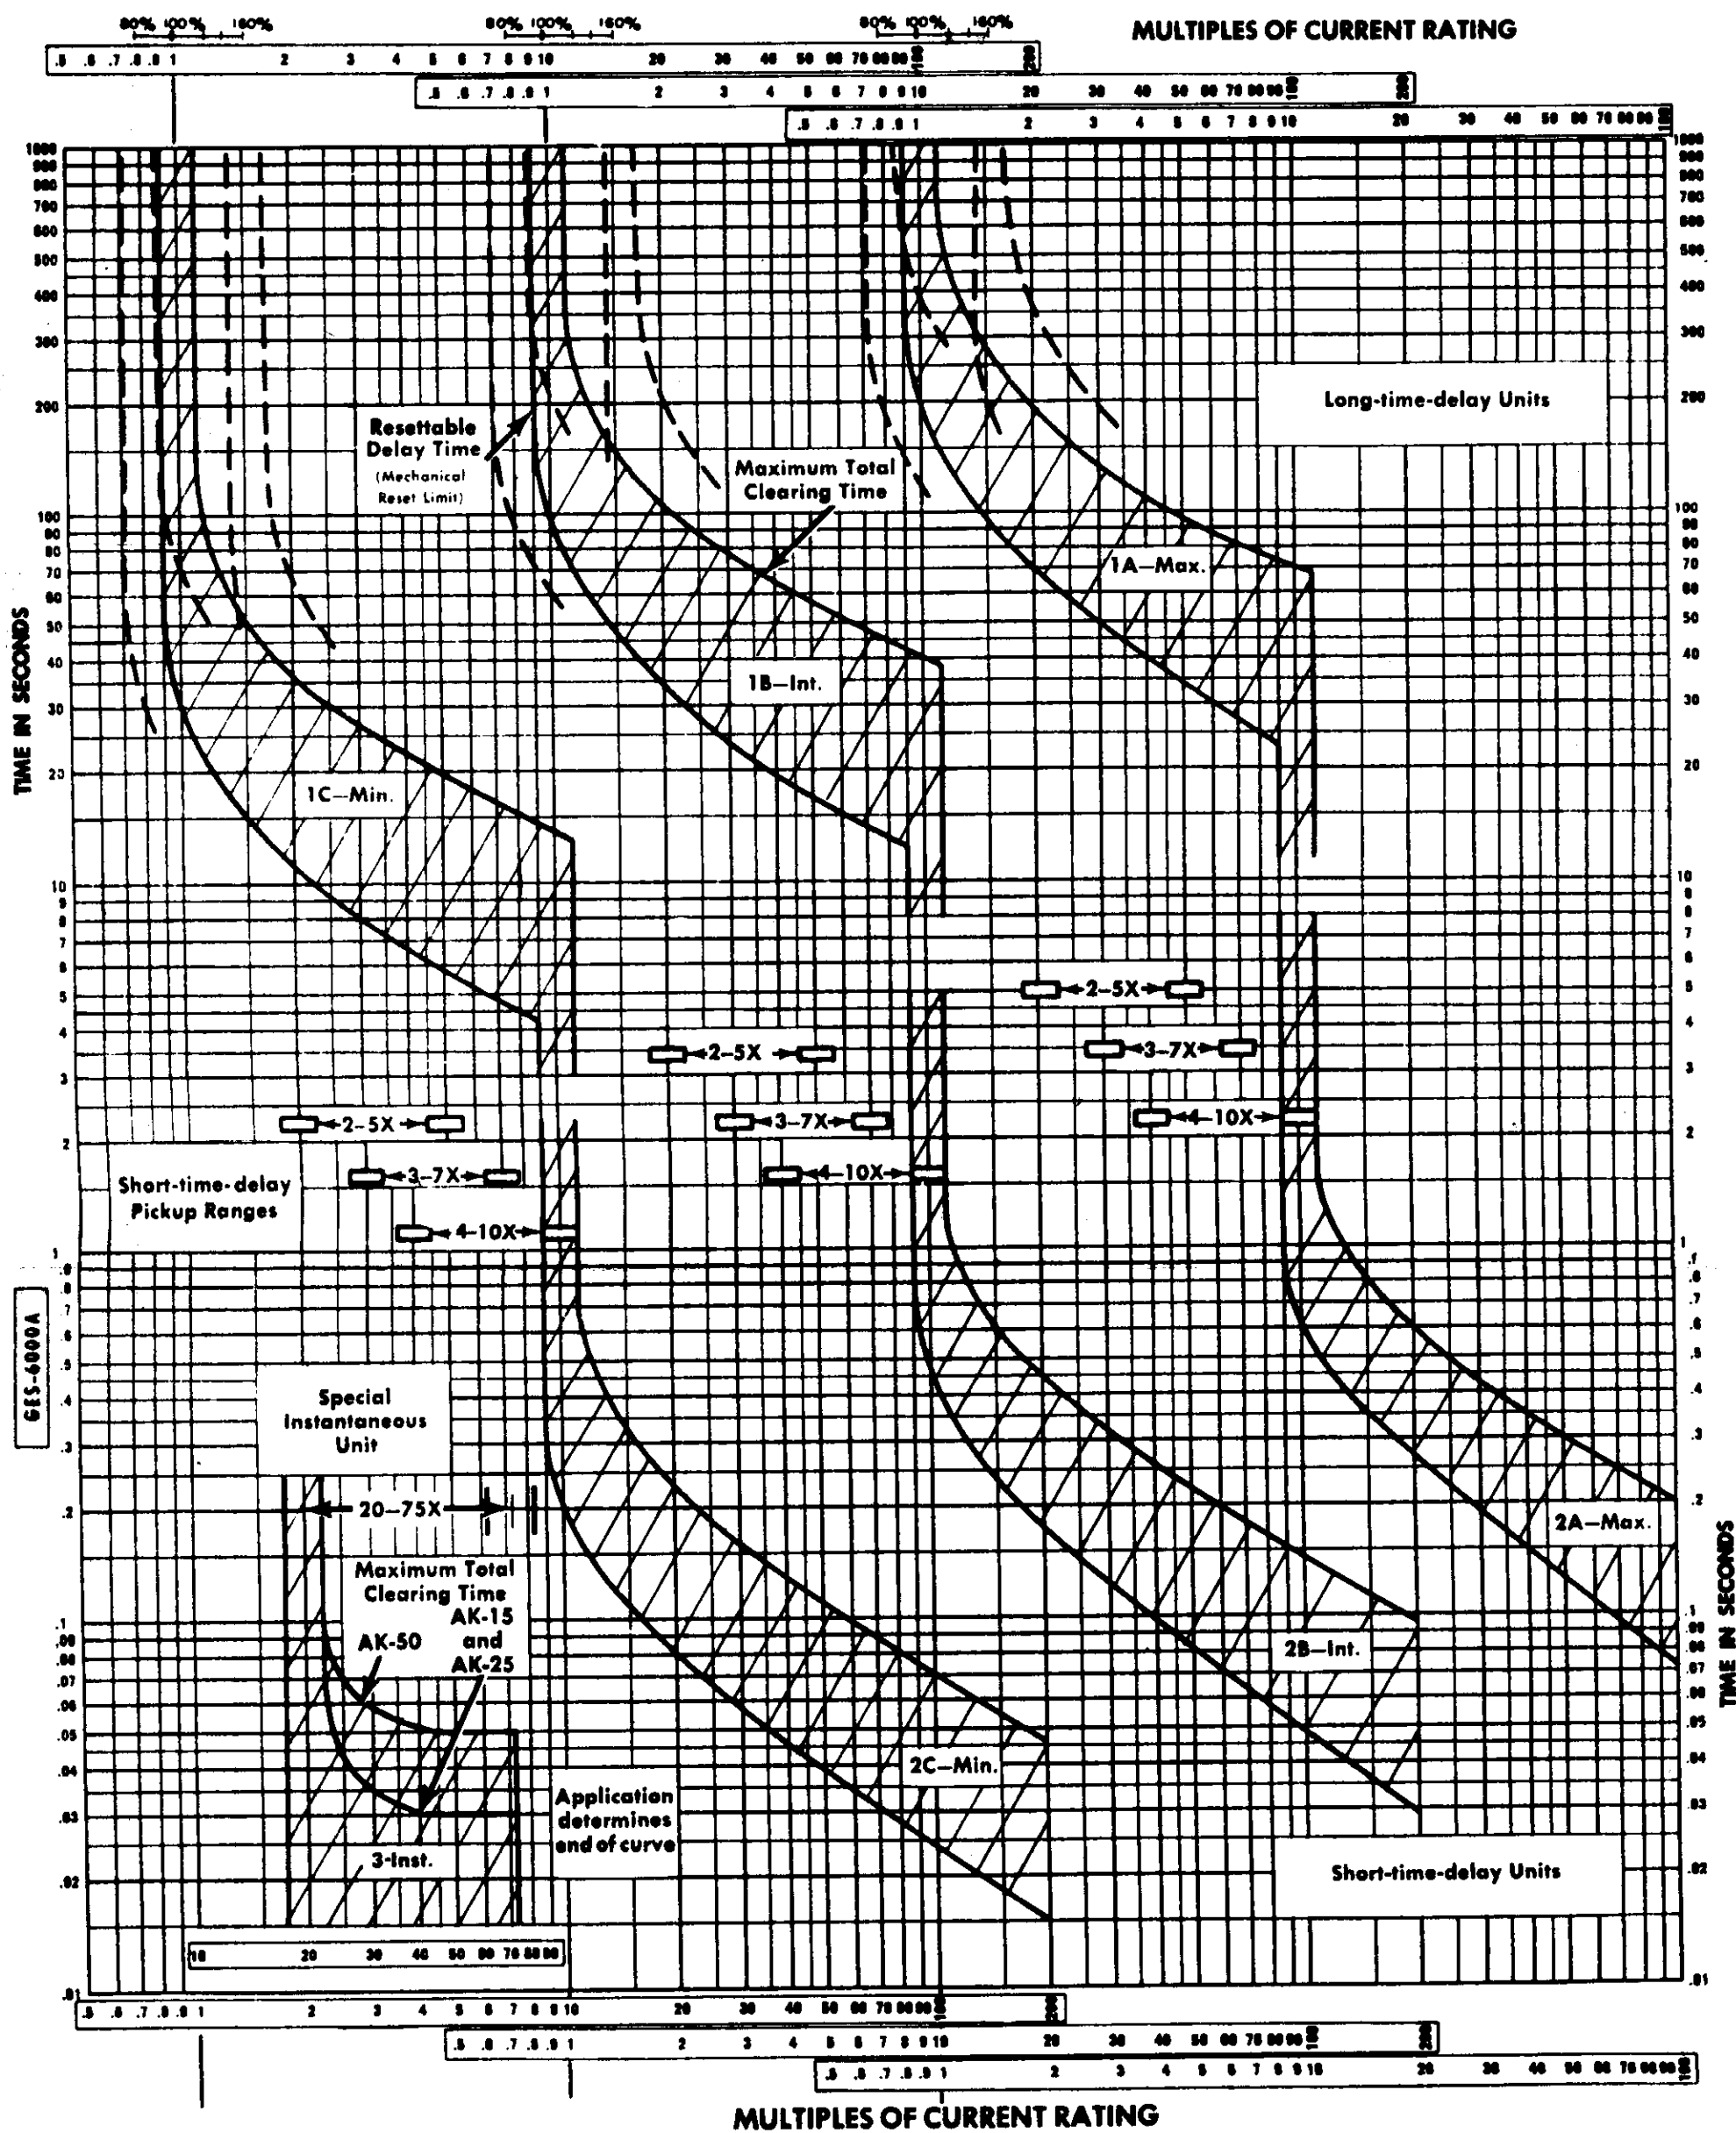

GENERAL ELECTRIC	TYPE AK LOW-VOLTAGE POWER CIRCUIT BREAKER EC-1 SERIES TRIP DEVICE	GES-6000A
Current Ratings (Amperes) AK-15 15, 20, 30, 40, 50, 70, 90, 100, 125 150, 175, 200, 225 AK-25 40, 50, 70, 90, 100, 125, 150, 175 200, 225, 250, 300, 350, 400, 500 AK-50 200, 225, 250, 300, 350, 400, 500 600, 800, 1000, 1200, 1600 AKT-50 2000	Long-time-delay, Short-time-delay and Instantaneous Time-current Curves (Curves apply at 60 Hertz for ambient temperature of 25 C)	Adjustments Long-time-delay Unit: Pickup current settings are 80 to 140% of rating. (Settings higher than 100% do not increase the continuous current ratings.) Short-time-delay Unit: Pickup current settings are 2 to 5X, or 3 to 7X, or 4 to 10X of ratings. Instantaneous Unit: Special pickup current settings are 20-75X of ratings.