


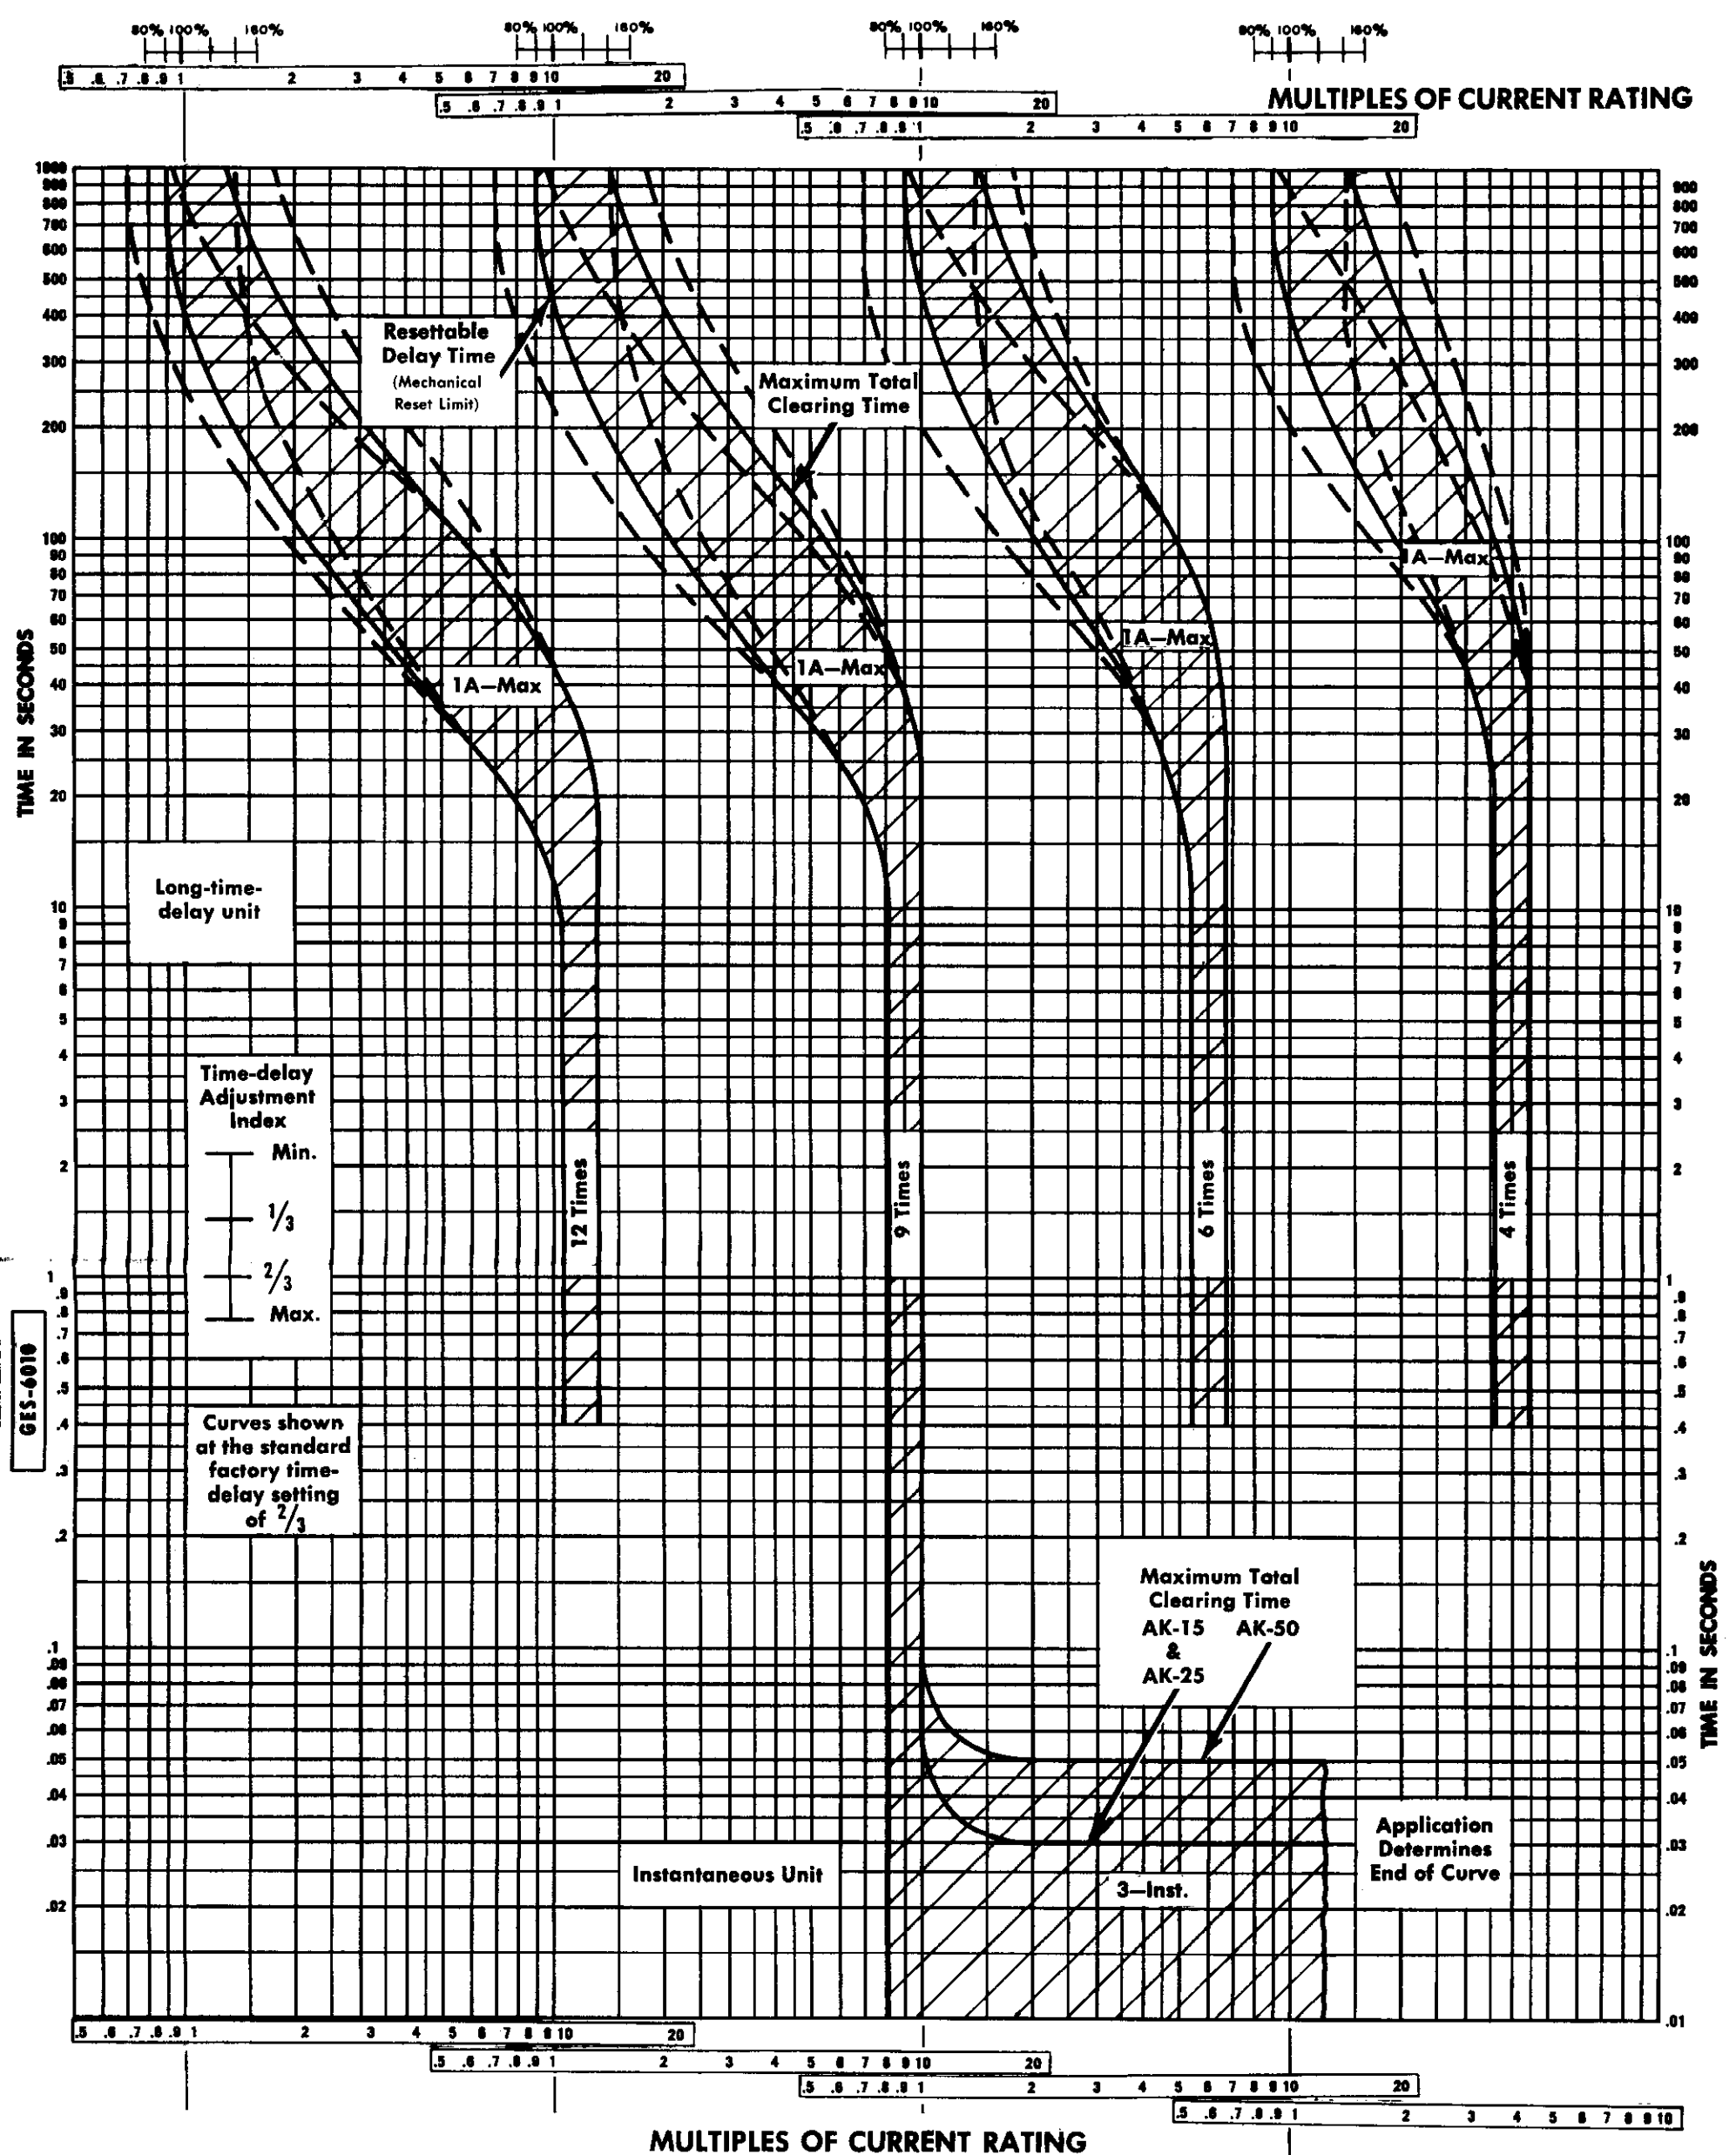

GENERAL ELECTRIC

**TYPE AK LOW-VOLTAGE POWER CIRCUIT BREAKER
EC-2 & EC-2A SERIES TRIP DEVICE**

GES-6010

Current Ratings (Amperes)

AK-15	15, 20, 30, 40, 50, 70, 90, 100
	125, 150, 175, 200, 225
AK-25	40, 50, 70, 90, 100, 125, 150, 175
	200, 225, 250, 300, 350, 400, 500
	600
AK-50	200, 225, 250, 300, 350, 400, 500
	600, 800, 1000, 1200, 1600

**1A-3 Long-time-delay and Instantaneous
Time-current Curves**

(Curves apply at 60 Hertz for ambient temperature of 25 C)

Adjustments

Long-time-delay Unit: Pickup settings are 80 to 160% of rating. (Settings higher than 100% do not increase the continuous current rating.)
Instantaneous Unit: Pickup settings are 4 to 9X, or 6 to 12X (std.), or 9 to 15X of rating.