


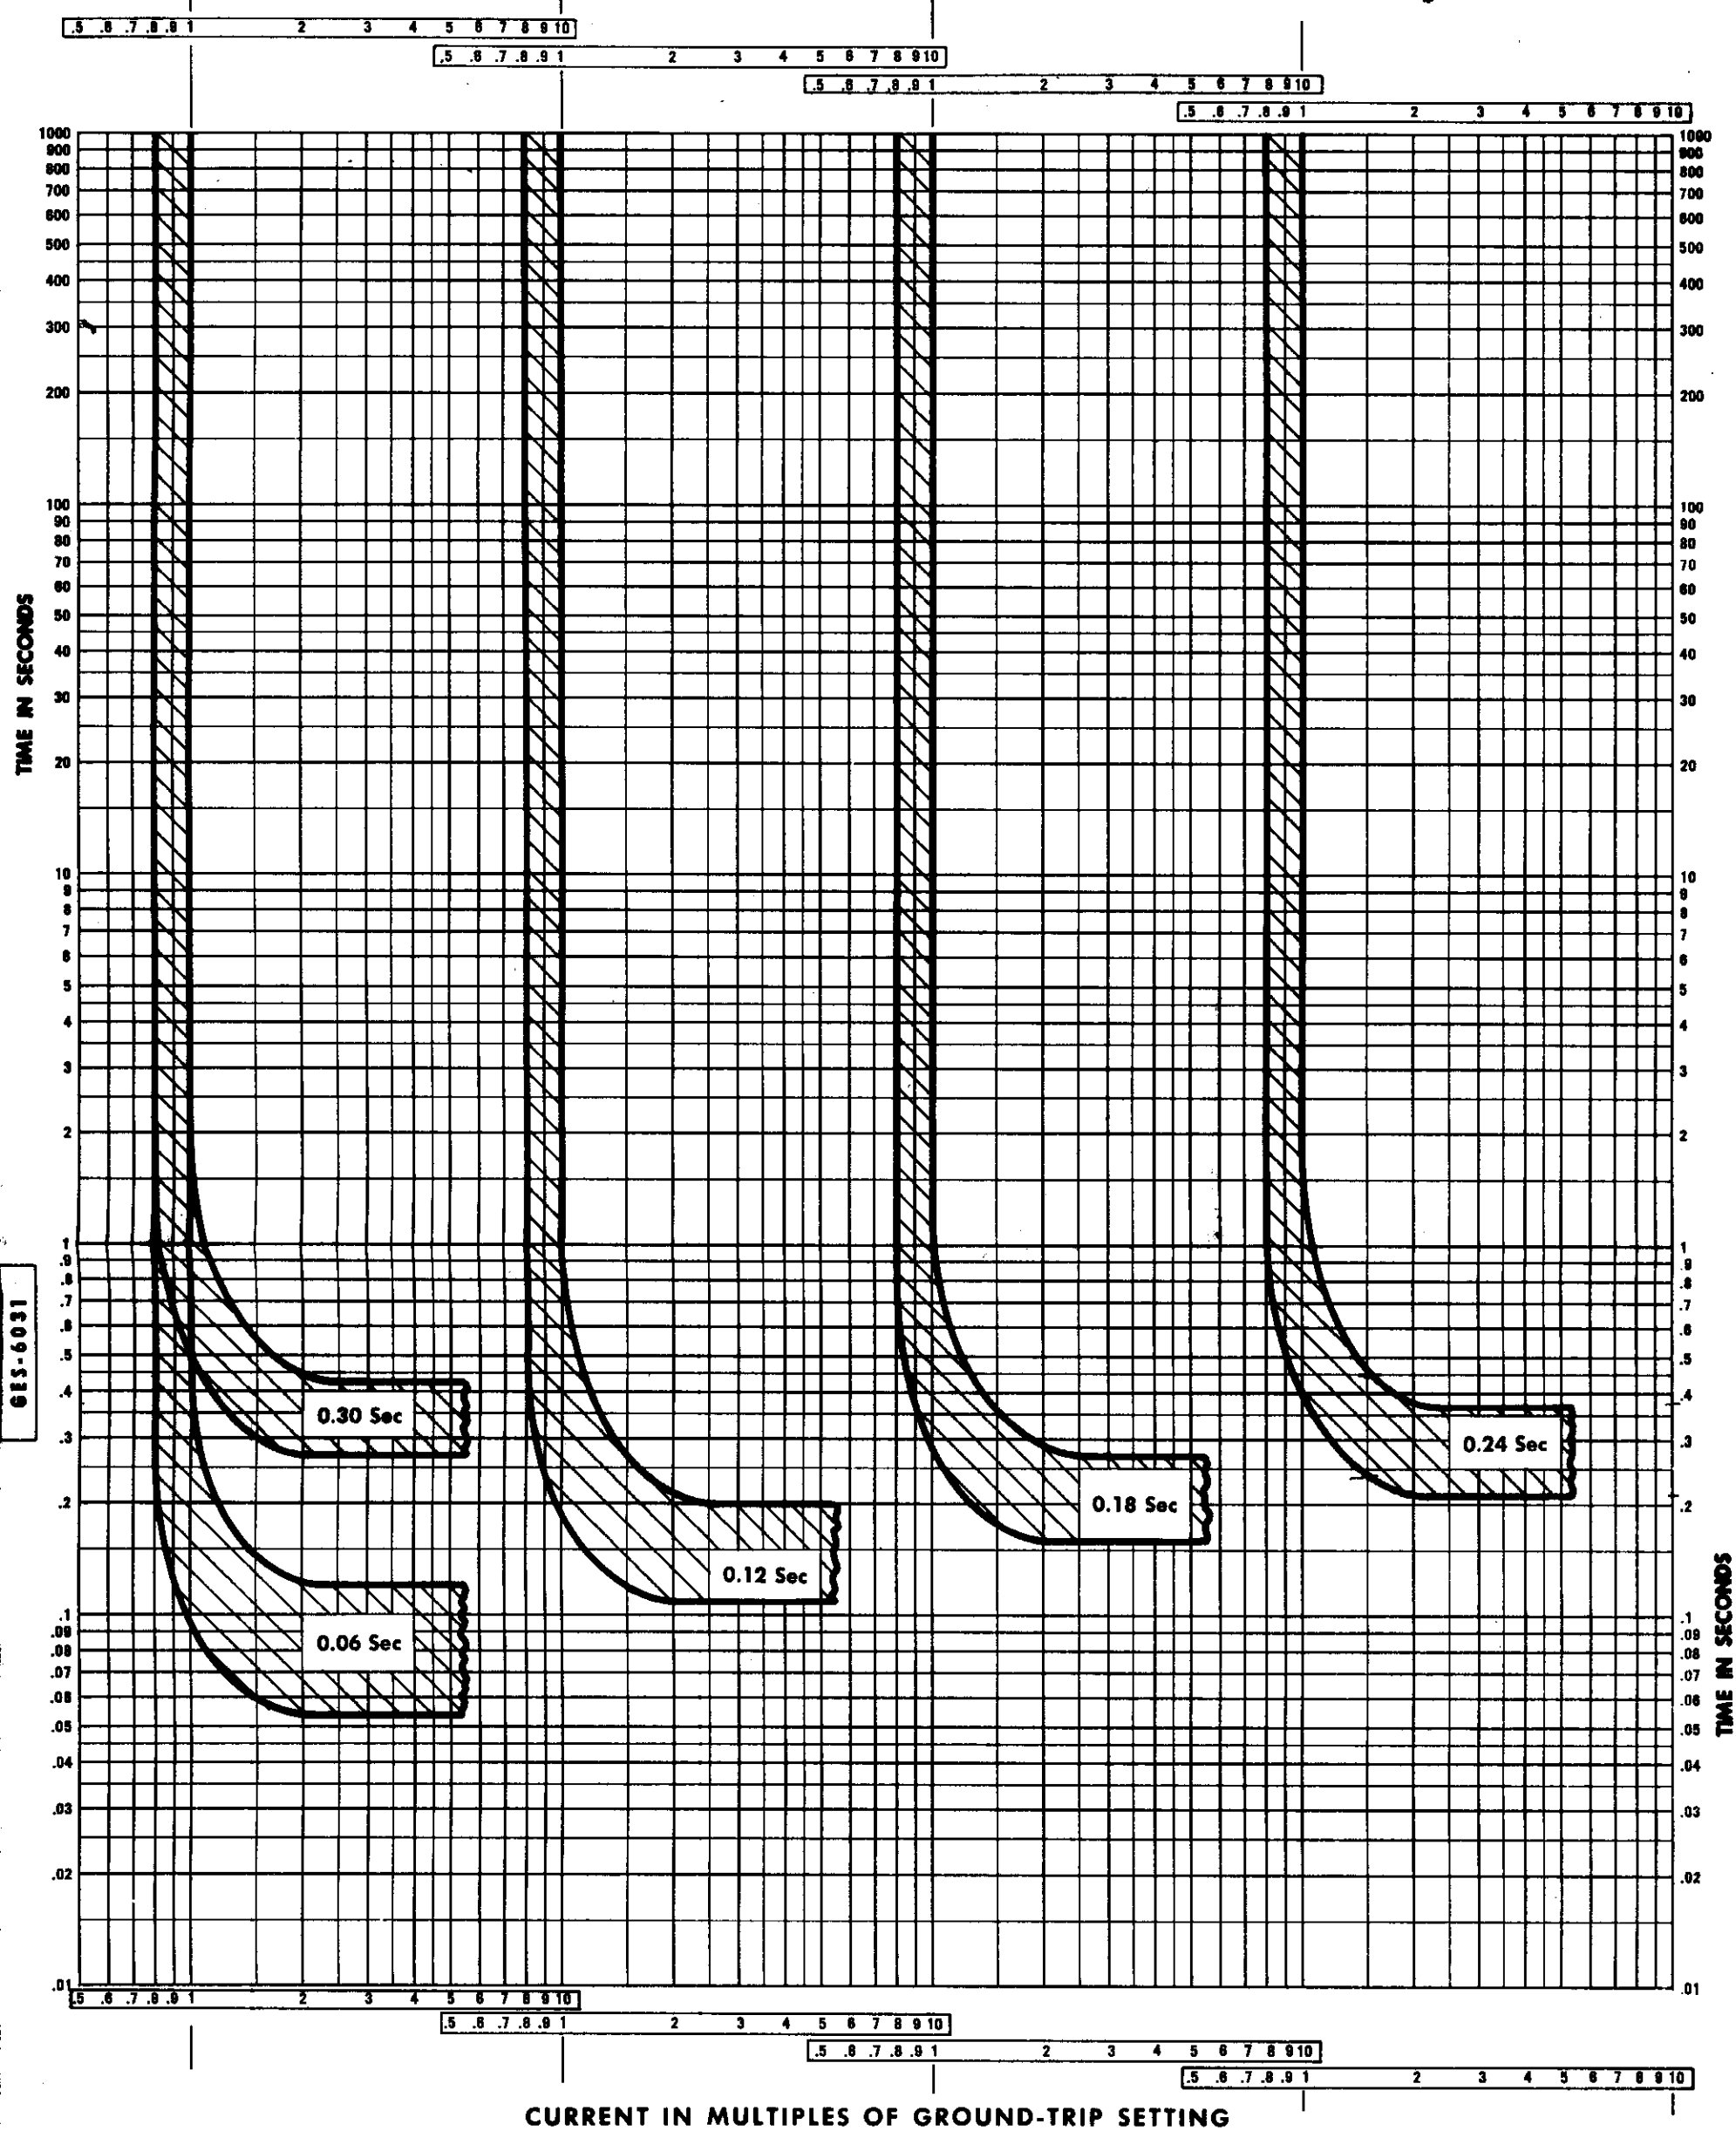

GENERAL ELECTRIC

TYPE AK LOW-VOLTAGE POWER CIRCUIT BREAKER
POWER SENSOR[†] SOLID-STATE GROUND-TRIP DEVICE

GES-6031

Ground-trip Settings (Ampere)

AK-25	100, 200, 300, 400
AK-25 & -50	300, 600, 900, 1200
AK-75 & -100	750, 1500, 2250, 3000

Type PS-1A Ground Trip
Time-current Curves

Adjustments

Short-time-delay Unit: Time settings are 0.06, 0.12, 0.18, 0.24, and 0.30 seconds.

[†] Trade-mark of General Electric Company

(Curves apply at 60 Hertz and from - 20 C to +55 C ambient)