


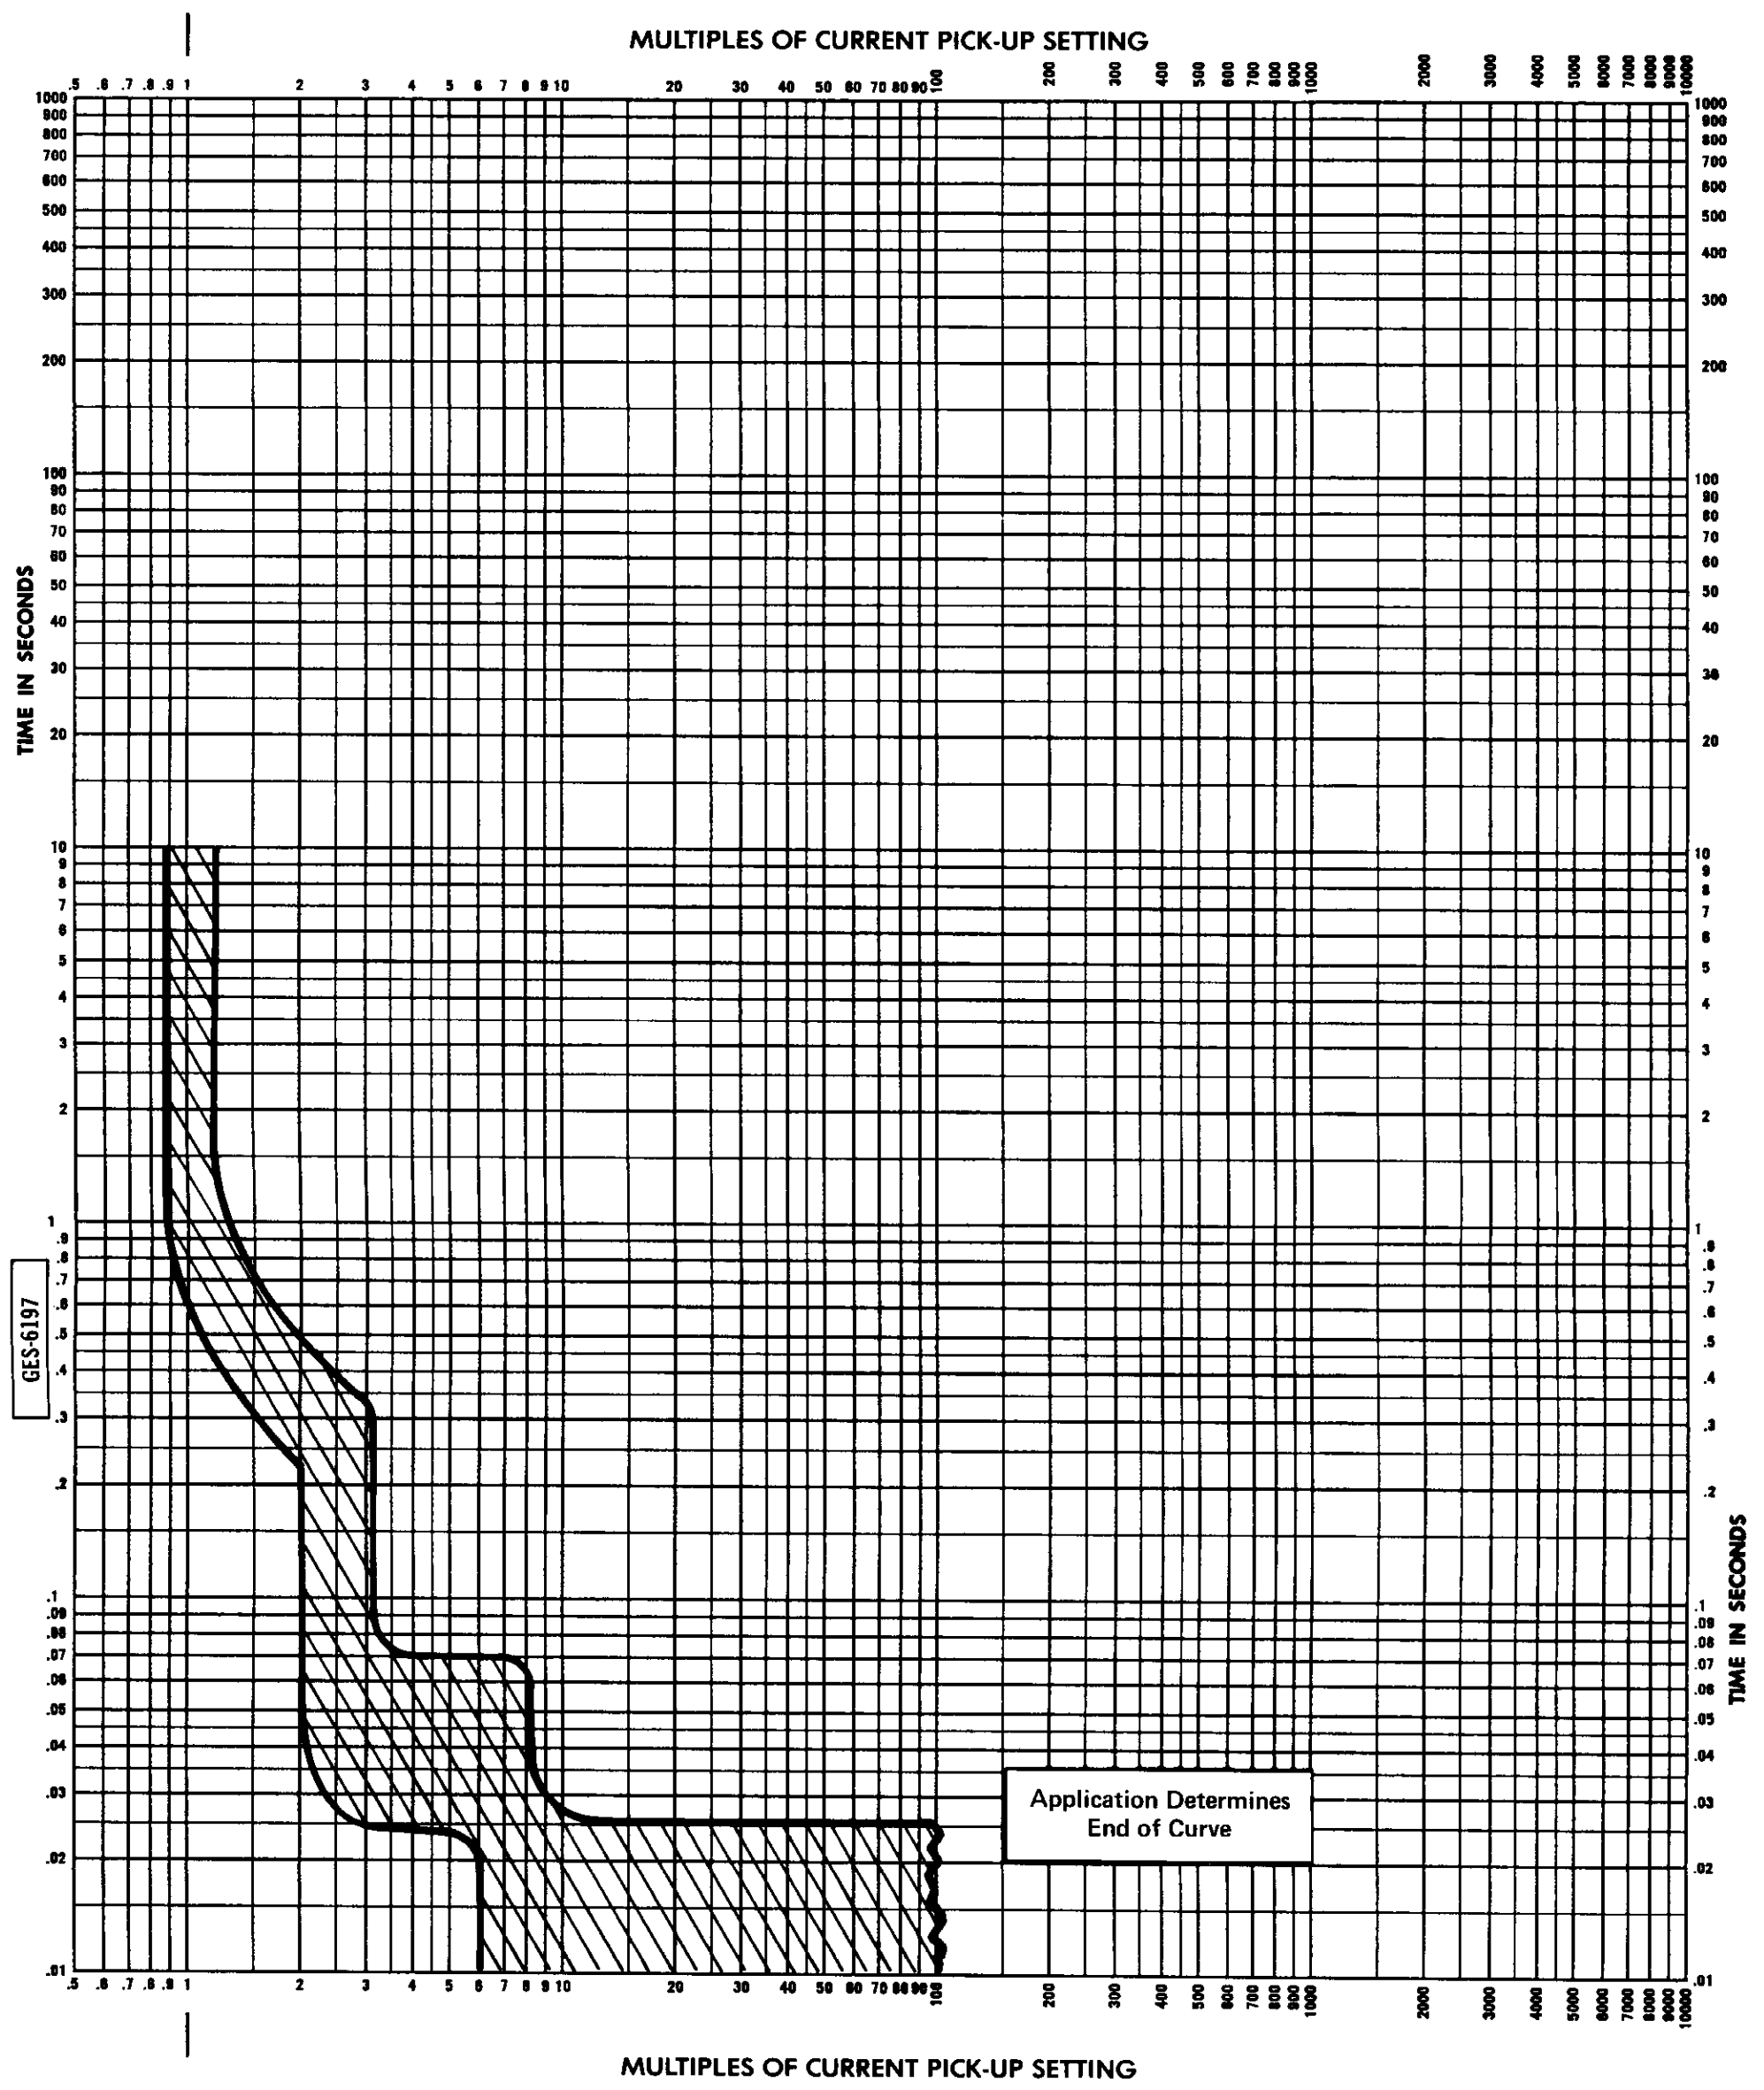

GENERAL ELECTRIC Current Pick-up Settings (Amperes) 0.05, 0.10, 0.15, 0.20, 0.25, 0.30 Control Voltage 120 Vac	MOLDED CASE CIRCUIT BREAKER GROUND-BREAK® TYPE MC Type TCPGR1S Equipment Ground Fault Protective Relay Time-current Curves (Curves apply at 50/60 Hertz and from -20C to +60C ambient)	GES-6197 Adjustments Ground current pick-up setting made by changing tap setting on the Type TMC GS current transformers.
--	--	---