

Power Distribution Connectors Conectores de Distribución de Energía Connecteurs de distribution de puissance

Item: 3TA3EG02
3TA6EG06

For Use With Frame EG
Para Usar Con Caja Base EG

Installation Instructions / Instructivo de Instalación

	⚠ Danger Hazardous Voltage. Will cause death or serious injury.	⚠ Peligro Tensión peligrosa. Puede causar la muerte o lesiones graves.	⚠ Danger Tension dangereuse. Danger de mort ou risque de blessures graves.
	Turn off and lock out all power supplying this device before working on this device. Replace all covers before power supplying this device is turned on.	Desenergice totalmente antes de instalar o darle servicio. Reemplace todas las barreras y cubiertas antes de energizar el interruptor.	Couper l'alimentation de l'appareil et barrer avant de travailler. Remplacez tous les couverts avant que l'approvisionnement de pouvoir soit alimenté.

Use only with Siemens certified components.




Utilizar únicamente con componentes certificados de Siemens.

A utiliser uniquement avec les composants certifiés Siemens.


Caution: Special Purpose wire connector. **NOT** for general use.

Precaucion: Proposito Especial conexion de terminales. **NO** es de uso general.


Attention: Connecteur de fil spécial et non pour l'usage général.

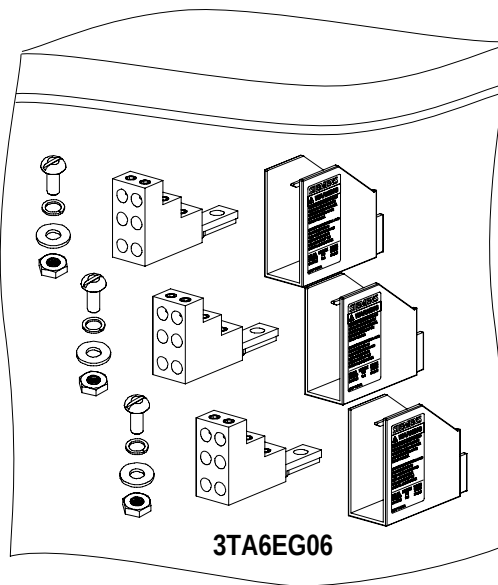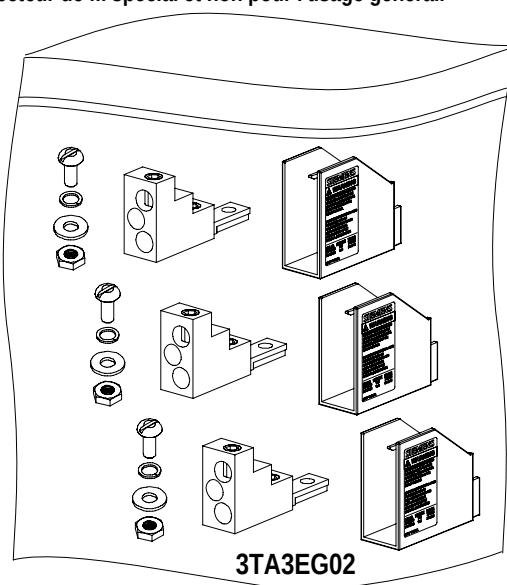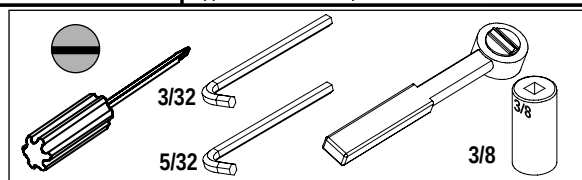


- 1 Disconnect Voltage. Trip breaker.
[Desconecte El Voltaje. Dispare El Triturador.]

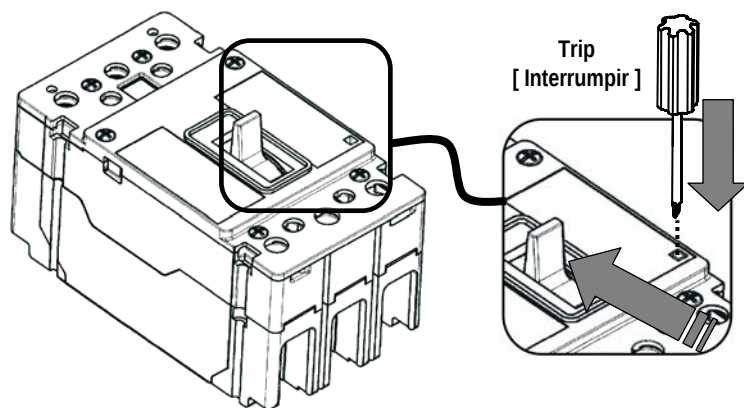

2

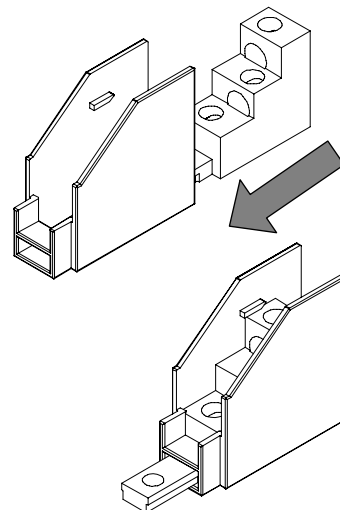

3

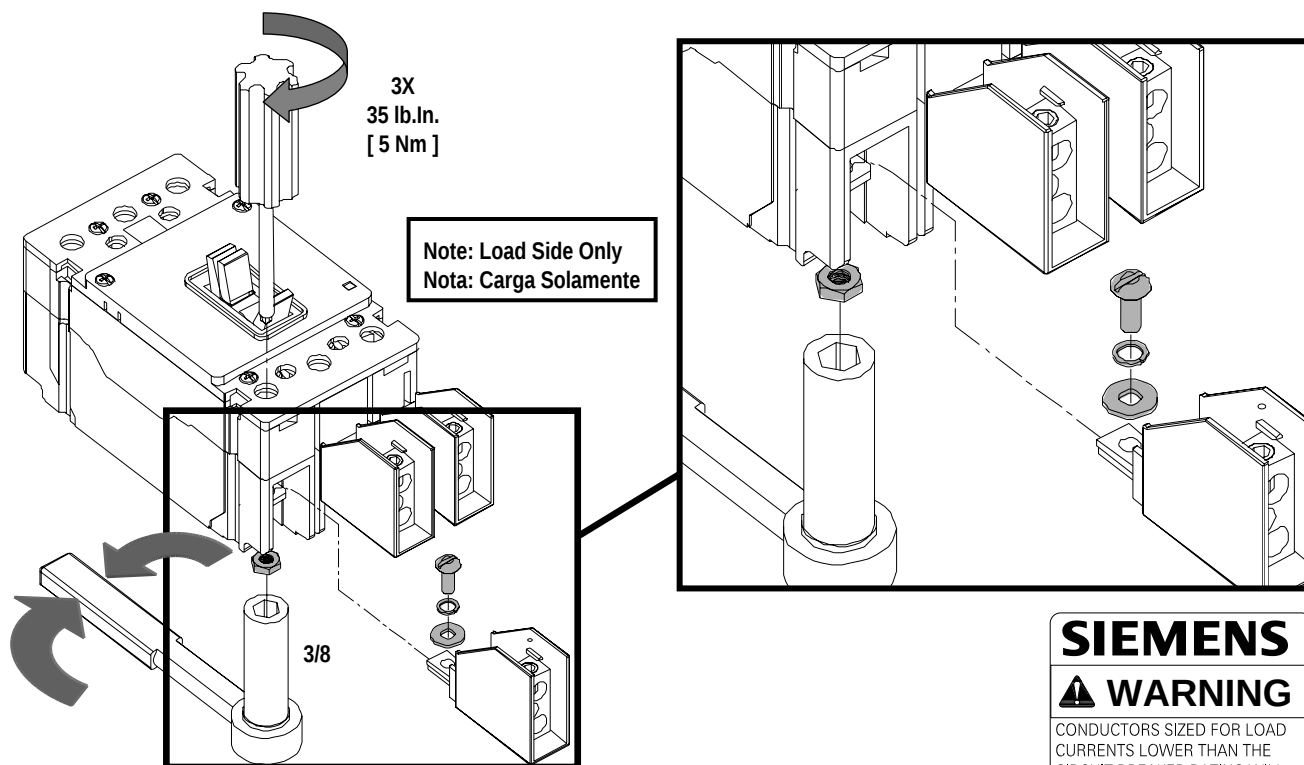**SIEMENS****⚠ WARNING**


CONDUCTORS SIZED FOR LOAD CURRENTS LOWER THAN THE CIRCUIT BREAKER RATING WILL NOT BE PROTECTED BY THE CIRCUIT BREAKER.



PROTECT EACH INDIVIDUAL LOAD CONDUCTOR WITH AN OVER-CURRENT DEVICE AND MEET ANY ADDITIONAL REQUIREMENTS OF THE NATIONAL ELECTRIC CODE.

CAT. NO.	WIRE SIZE	TORQUE
3TA3EG02	14-2	70 LB-IN
3TA6EG06	14-6	25 LB-IN

60/75 °C CU/AL

4

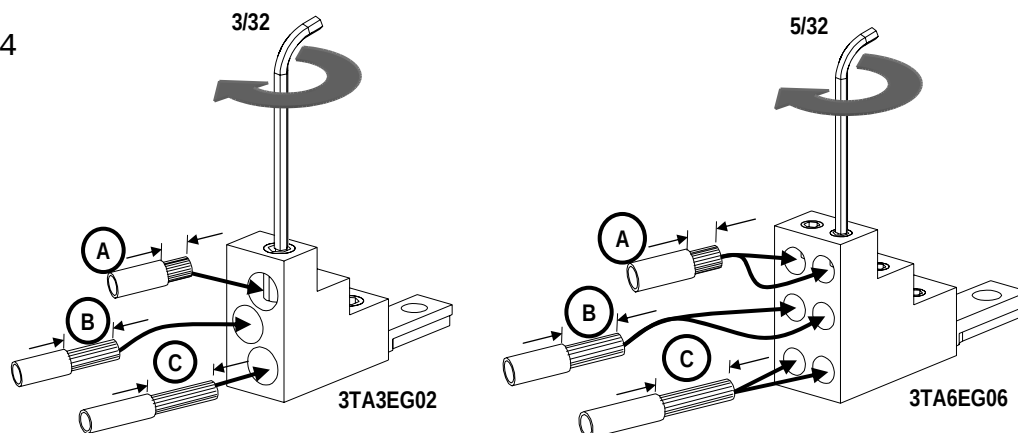

Wire Connector [Conexión del cable]	60°C and 75°C Wire Size [Rango Cable]	Req. Wire Stranding [Hebras] UL 486A - 486B		Torque [Esfuerzo de torsión]	Wire Strip Length [Quitar]		
		CU / AL Class B	CU Class C		(A)	(B)	(C)
 3TA3EG02	(Cu / Al) 14 - 2 AWG [2.5 - 35 mm²]	7	19	70 lb. in. [8 Nm]	.38 - .50 [9.7 - 13mm]	.75 - .88 [19 - 22mm]	1.25 - 1.38 [32 - 35mm]
 3TA6EG06	(Cu / Al) 14 - 6 AWG [2.5 - 16 mm²]	7	19	25 lb. in. [3 Nm]			

Technical Support:

Toll Free: 1-800-964-4114

Internet: www.sea.siemens.com

Subject to change without prior notice
Siemens Energy & Automation Inc. , Alpharetta, GA U.S.A.

2 / 2

© Siemens Energy & Automation Inc. 2004

IL01219041EH02
807898A01