




AB DE-ION® CIRCUIT BREAKERS
Types EB, EHB, FB, MARK 75® Type HFB


Type EB: 15-40 Amperes, 2 and 3 Poles, 240 Volts Ac Max.
Type EHB: 15-40 Amperes, 2 and 3 Poles, 480 Volts Ac Max.
Type FB: 15-40 Amperes, 2 and 3 Poles, 600 Volts Ac Max.
Type HFB: 15-40 Amperes, 2 and 3 Poles, 600 Volts Ac Max.



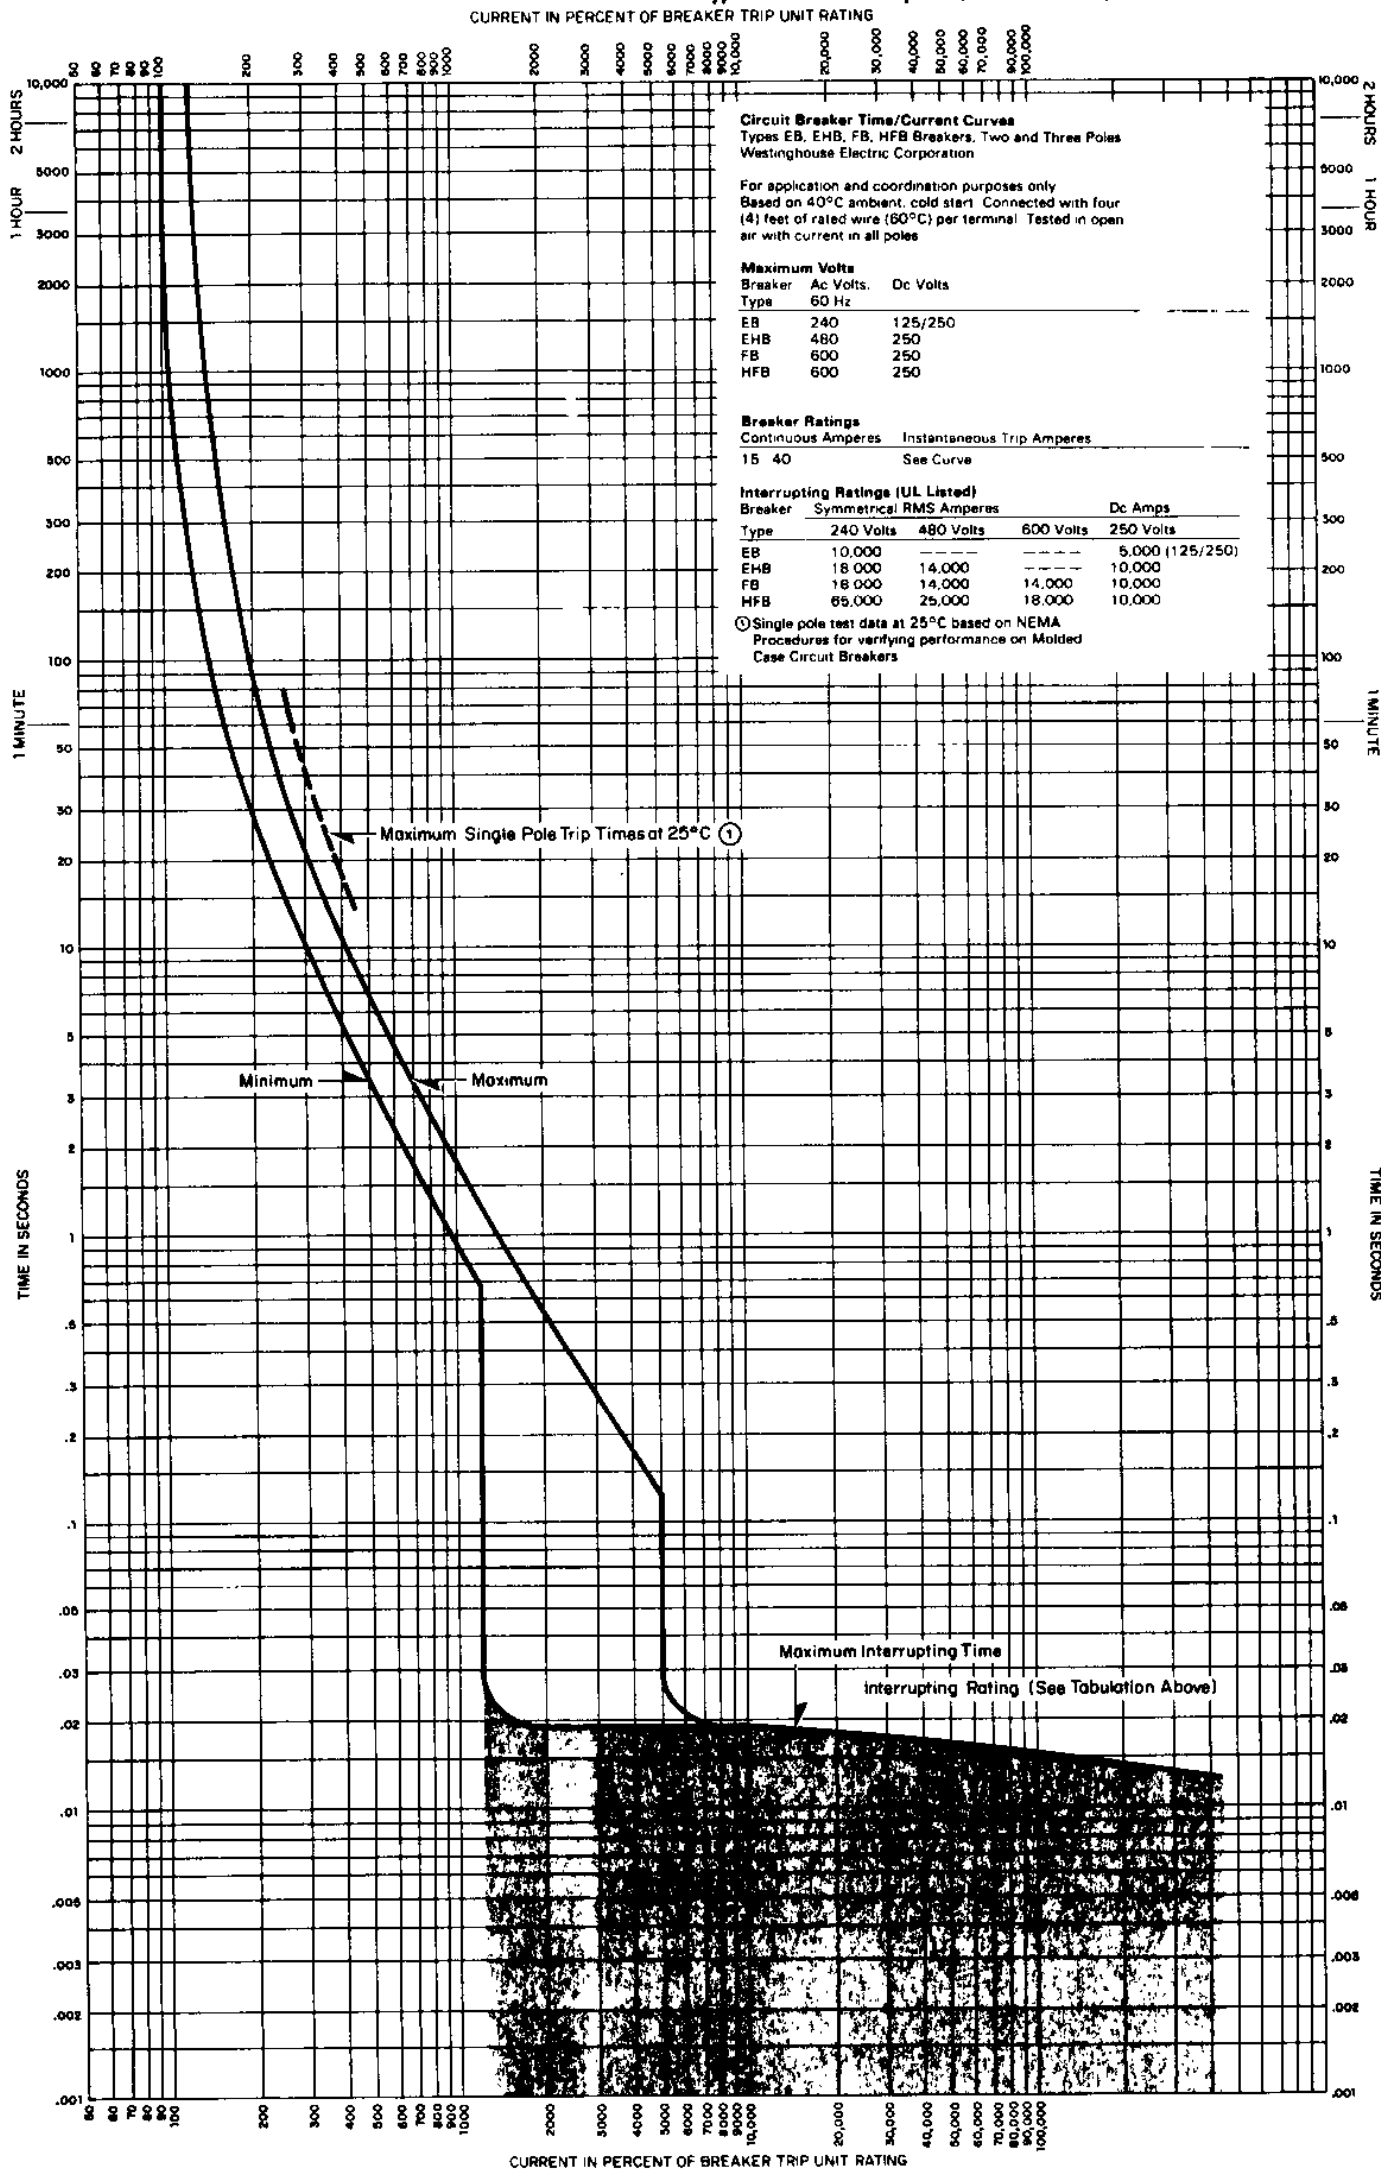

AB DE-ION® CIRCUIT BREAKERS
Types EB, EHB, FB, MARK 75® HFB

Type EB: 50-70 Amperes, 2 and 3 Poles, 240 Volts Ac Max.
Type EHB: 50-70 Amperes, 2 and 3 Poles, 480 Volts Ac Max.
Type FB: 50-70 Amperes, 2 and 3 Poles, 600 Volts Ac Max.
Type HFB: 50-70 Amperes, 2 and 3 Poles, 600 Volts Ac Max.

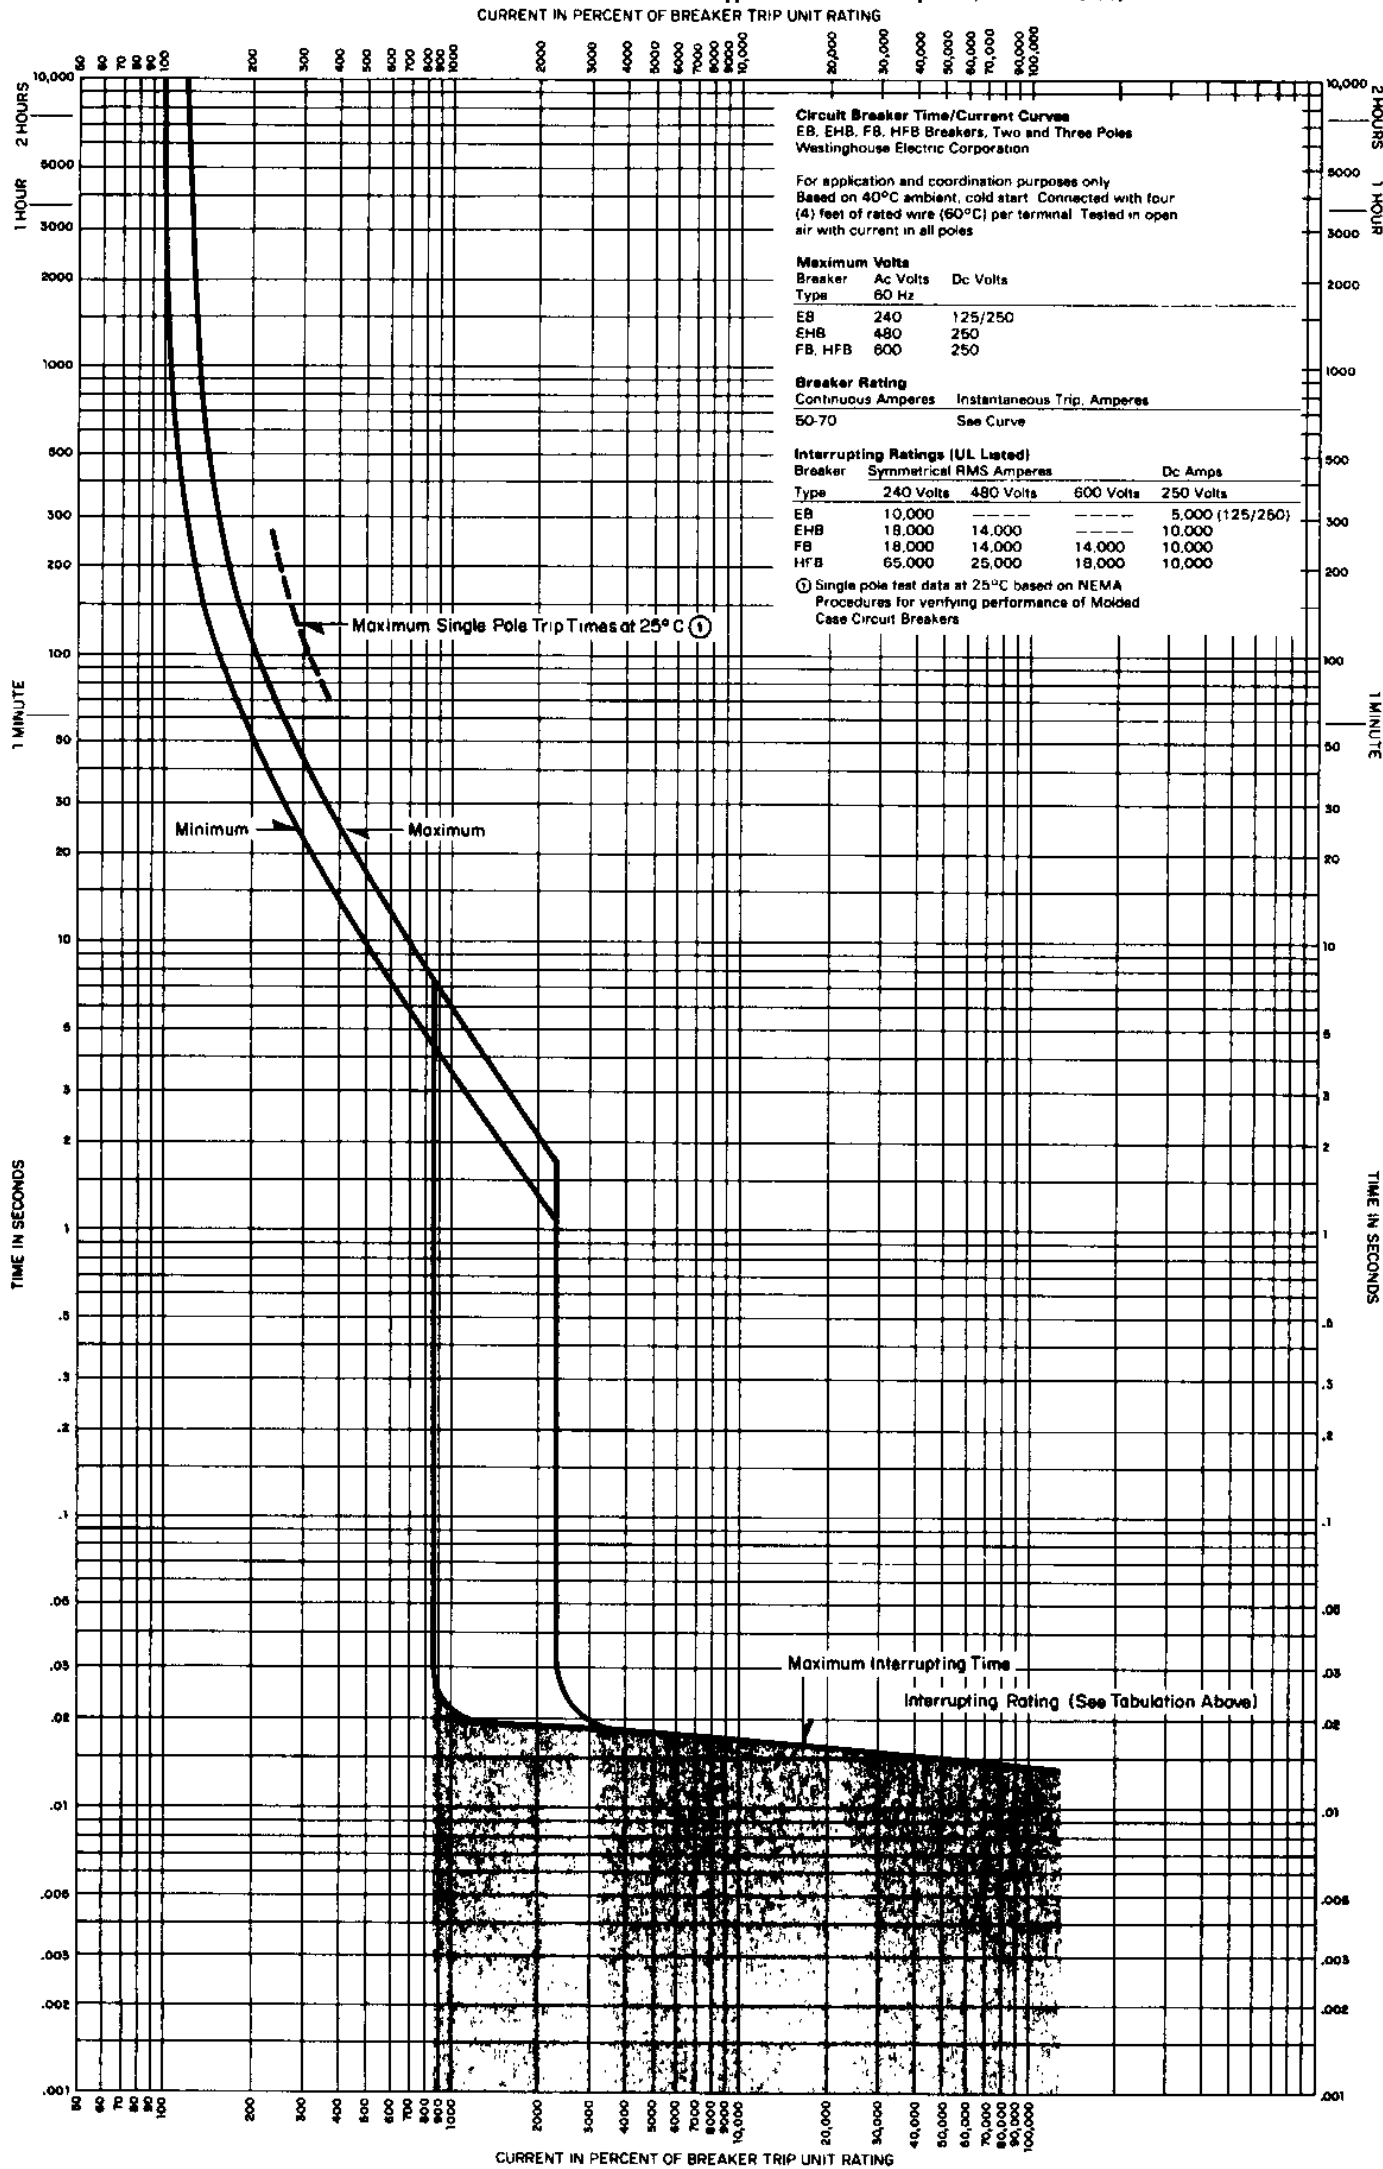



AB DE-ION® CIRCUIT BREAKERS
Types EB, EHB, FB, MARK 75® HFB

Type EB: 90-100 Amperes, 2 and 3 Poles, 240 Volts Ac Max.
Type EHB: 90-100 Amperes, 2 and 3 Poles, 480 Volts Ac Max.
Type FB: 90-150 Amperes, 2 and 3 Poles, 600 Volts Ac Max.
Type HFB: 90-150 Amperes, 2 and 3 Poles, 600 Volts Ac Max.

