




AB DE-ION® CIRCUIT BREAKERS
TRI-PAC® Type FB


40 Amperes, 2 and 3 Poles, 600 Volts Ac Max.
250 Volts Dc



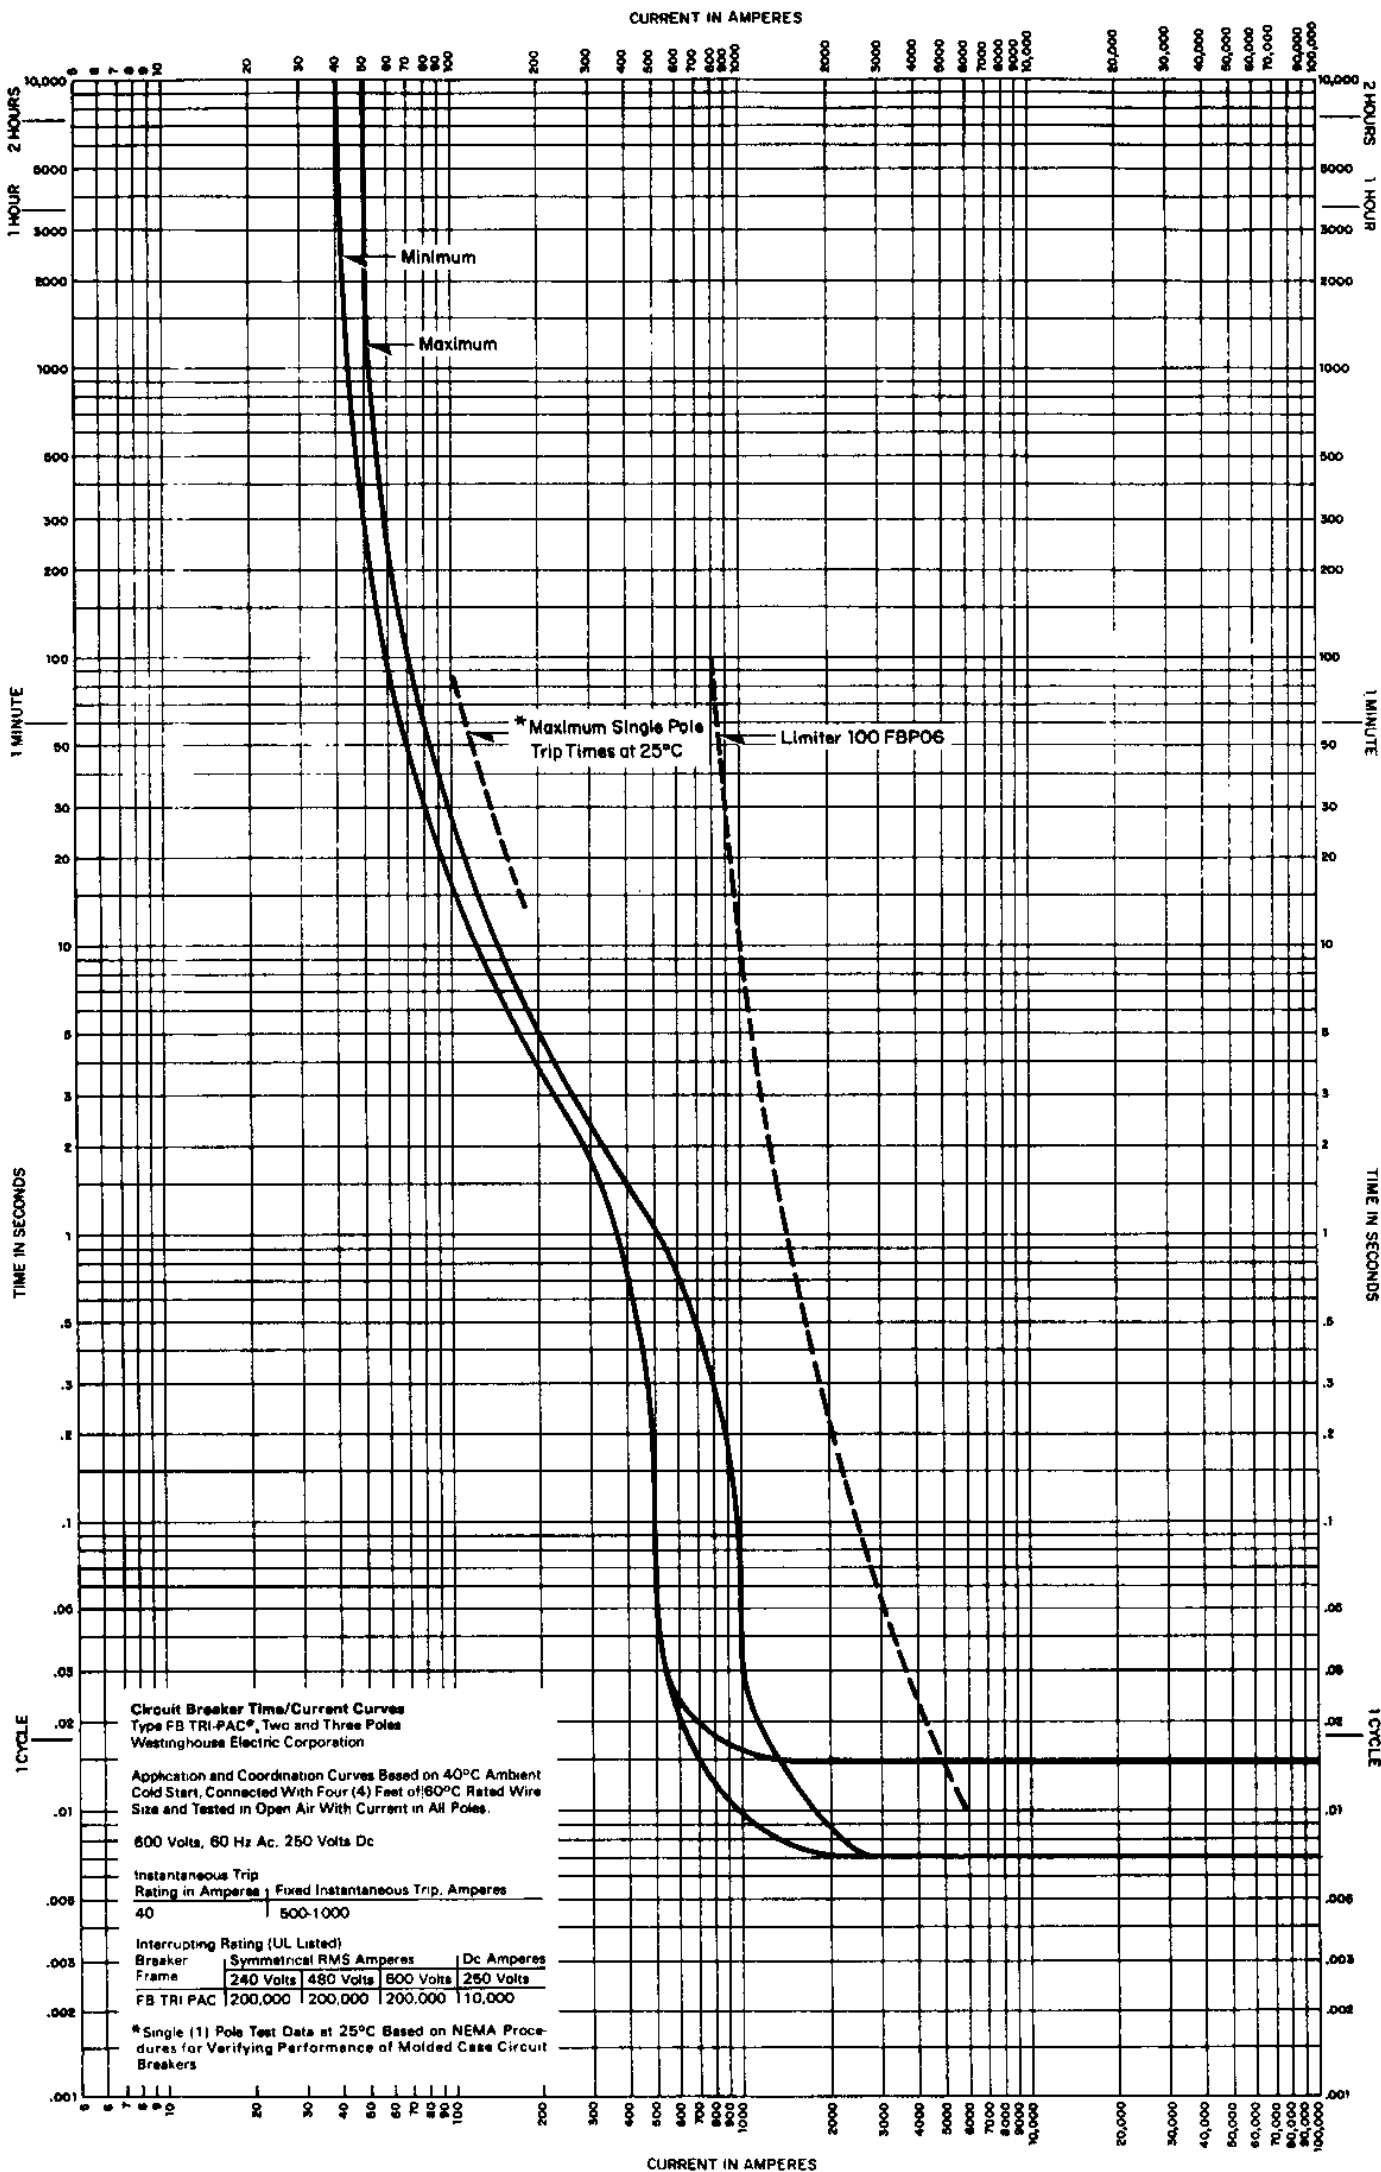

AB DE-ION® CIRCUIT BREAKERS
TRI-PAC® Type FB

50 Amperes, 2 and 3 Poles, 600 Volts Ac Max.
250 Volts Dc

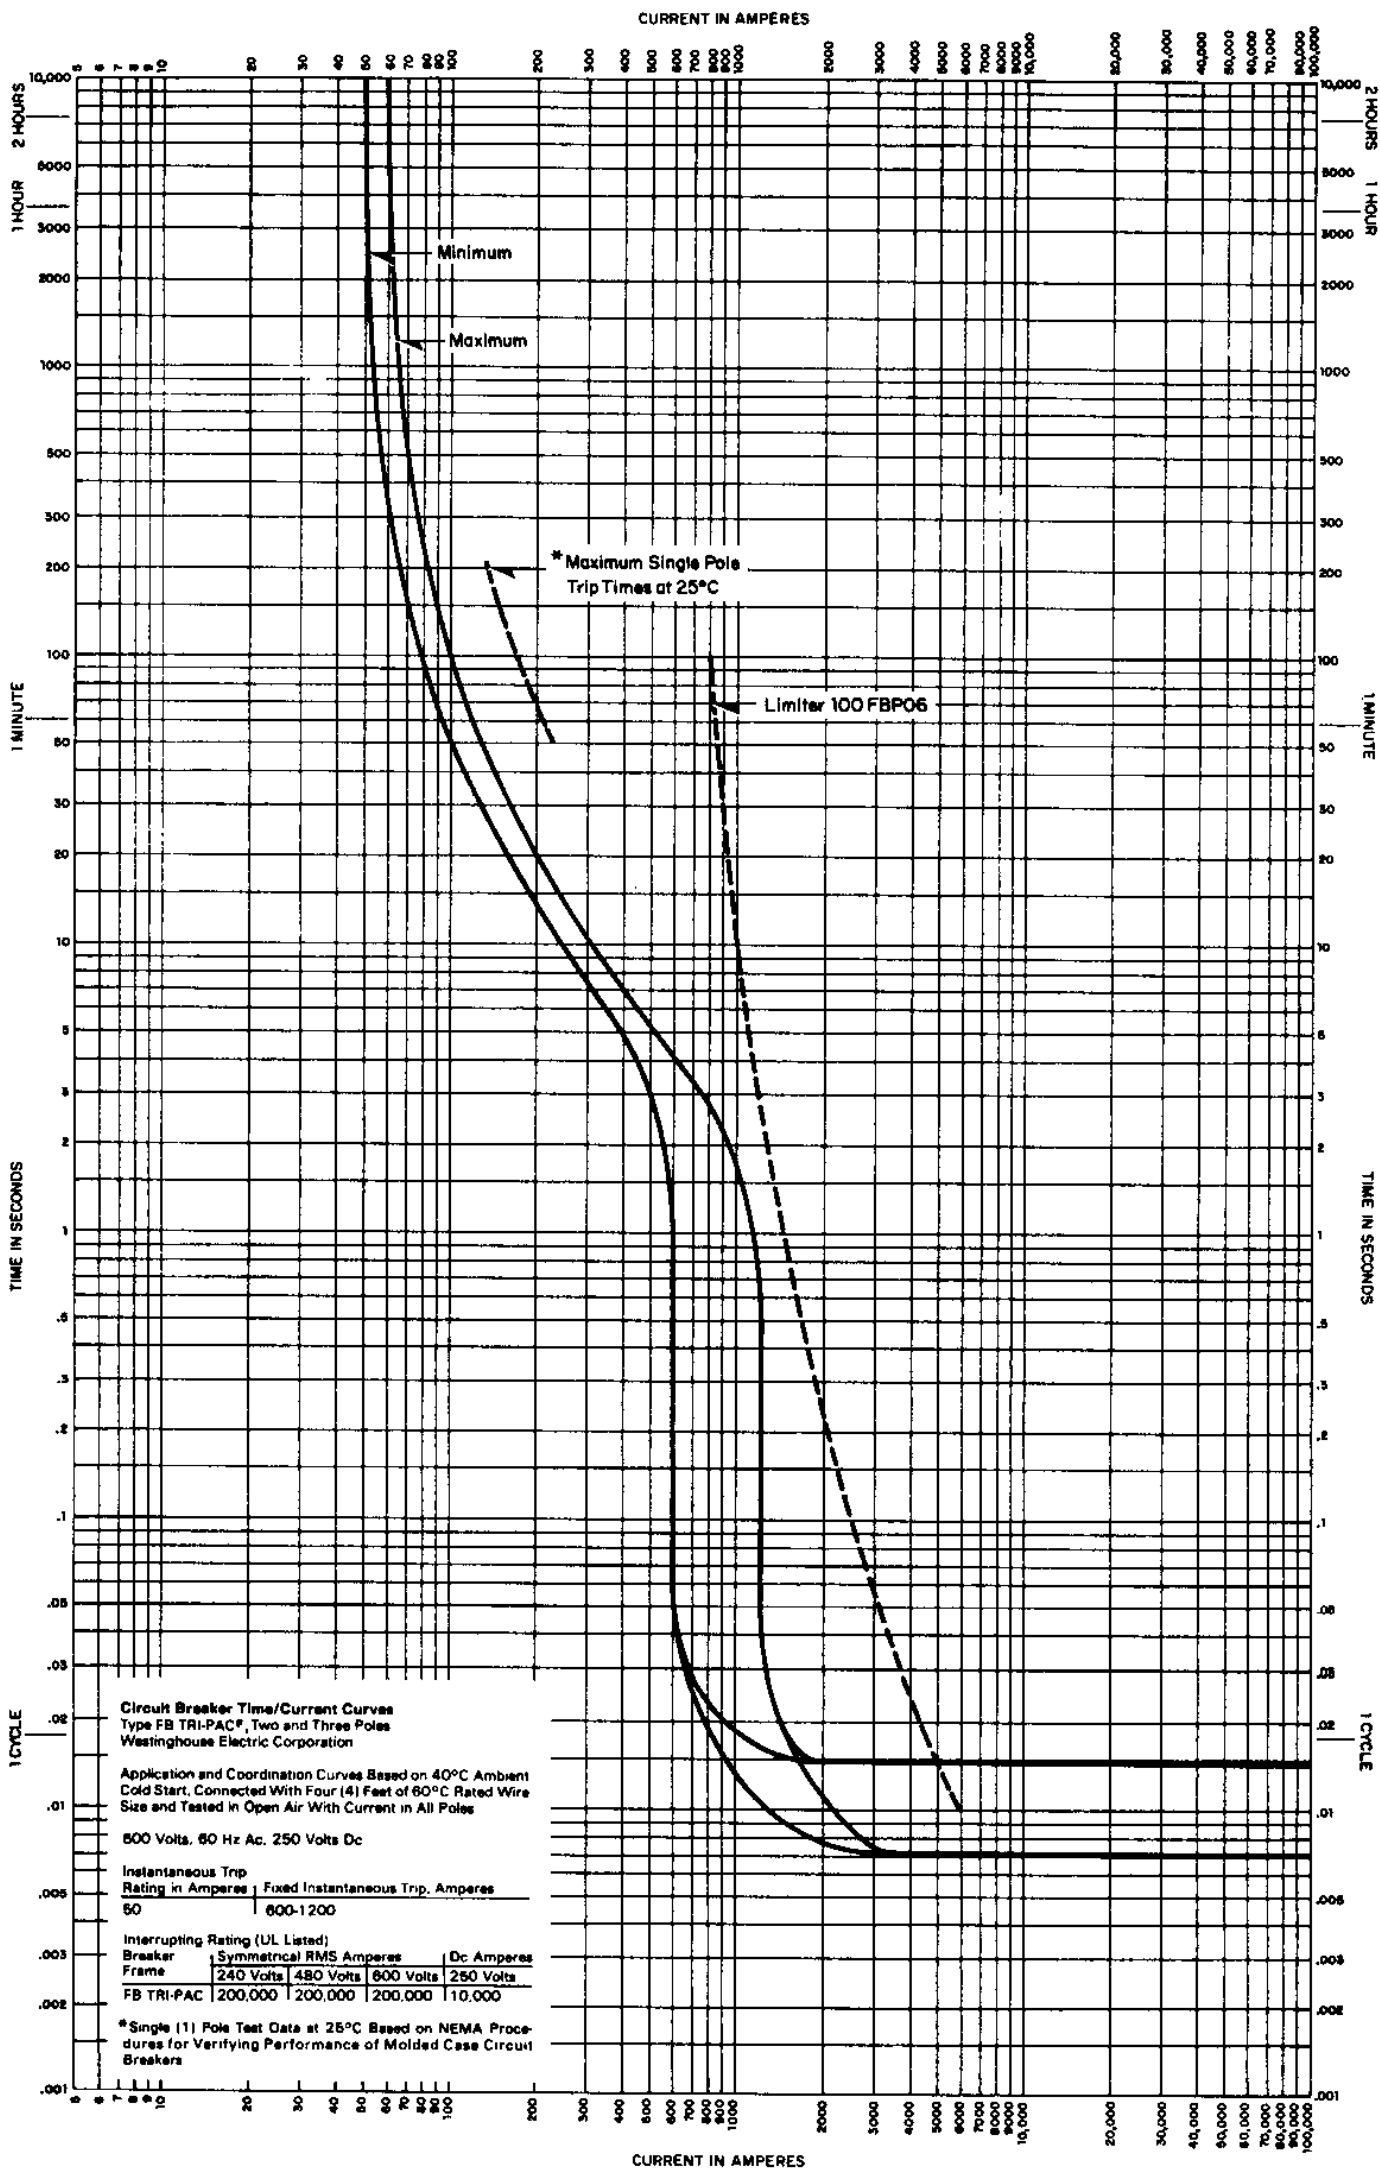




AB DE-ION® CIRCUIT BREAKERS
TRI-PAC® Type FB

70 Amperes, 2 and 3 Poles, 600 Volts Ac Max.
250 Volts Dc

29-162 A WEA
Application Data

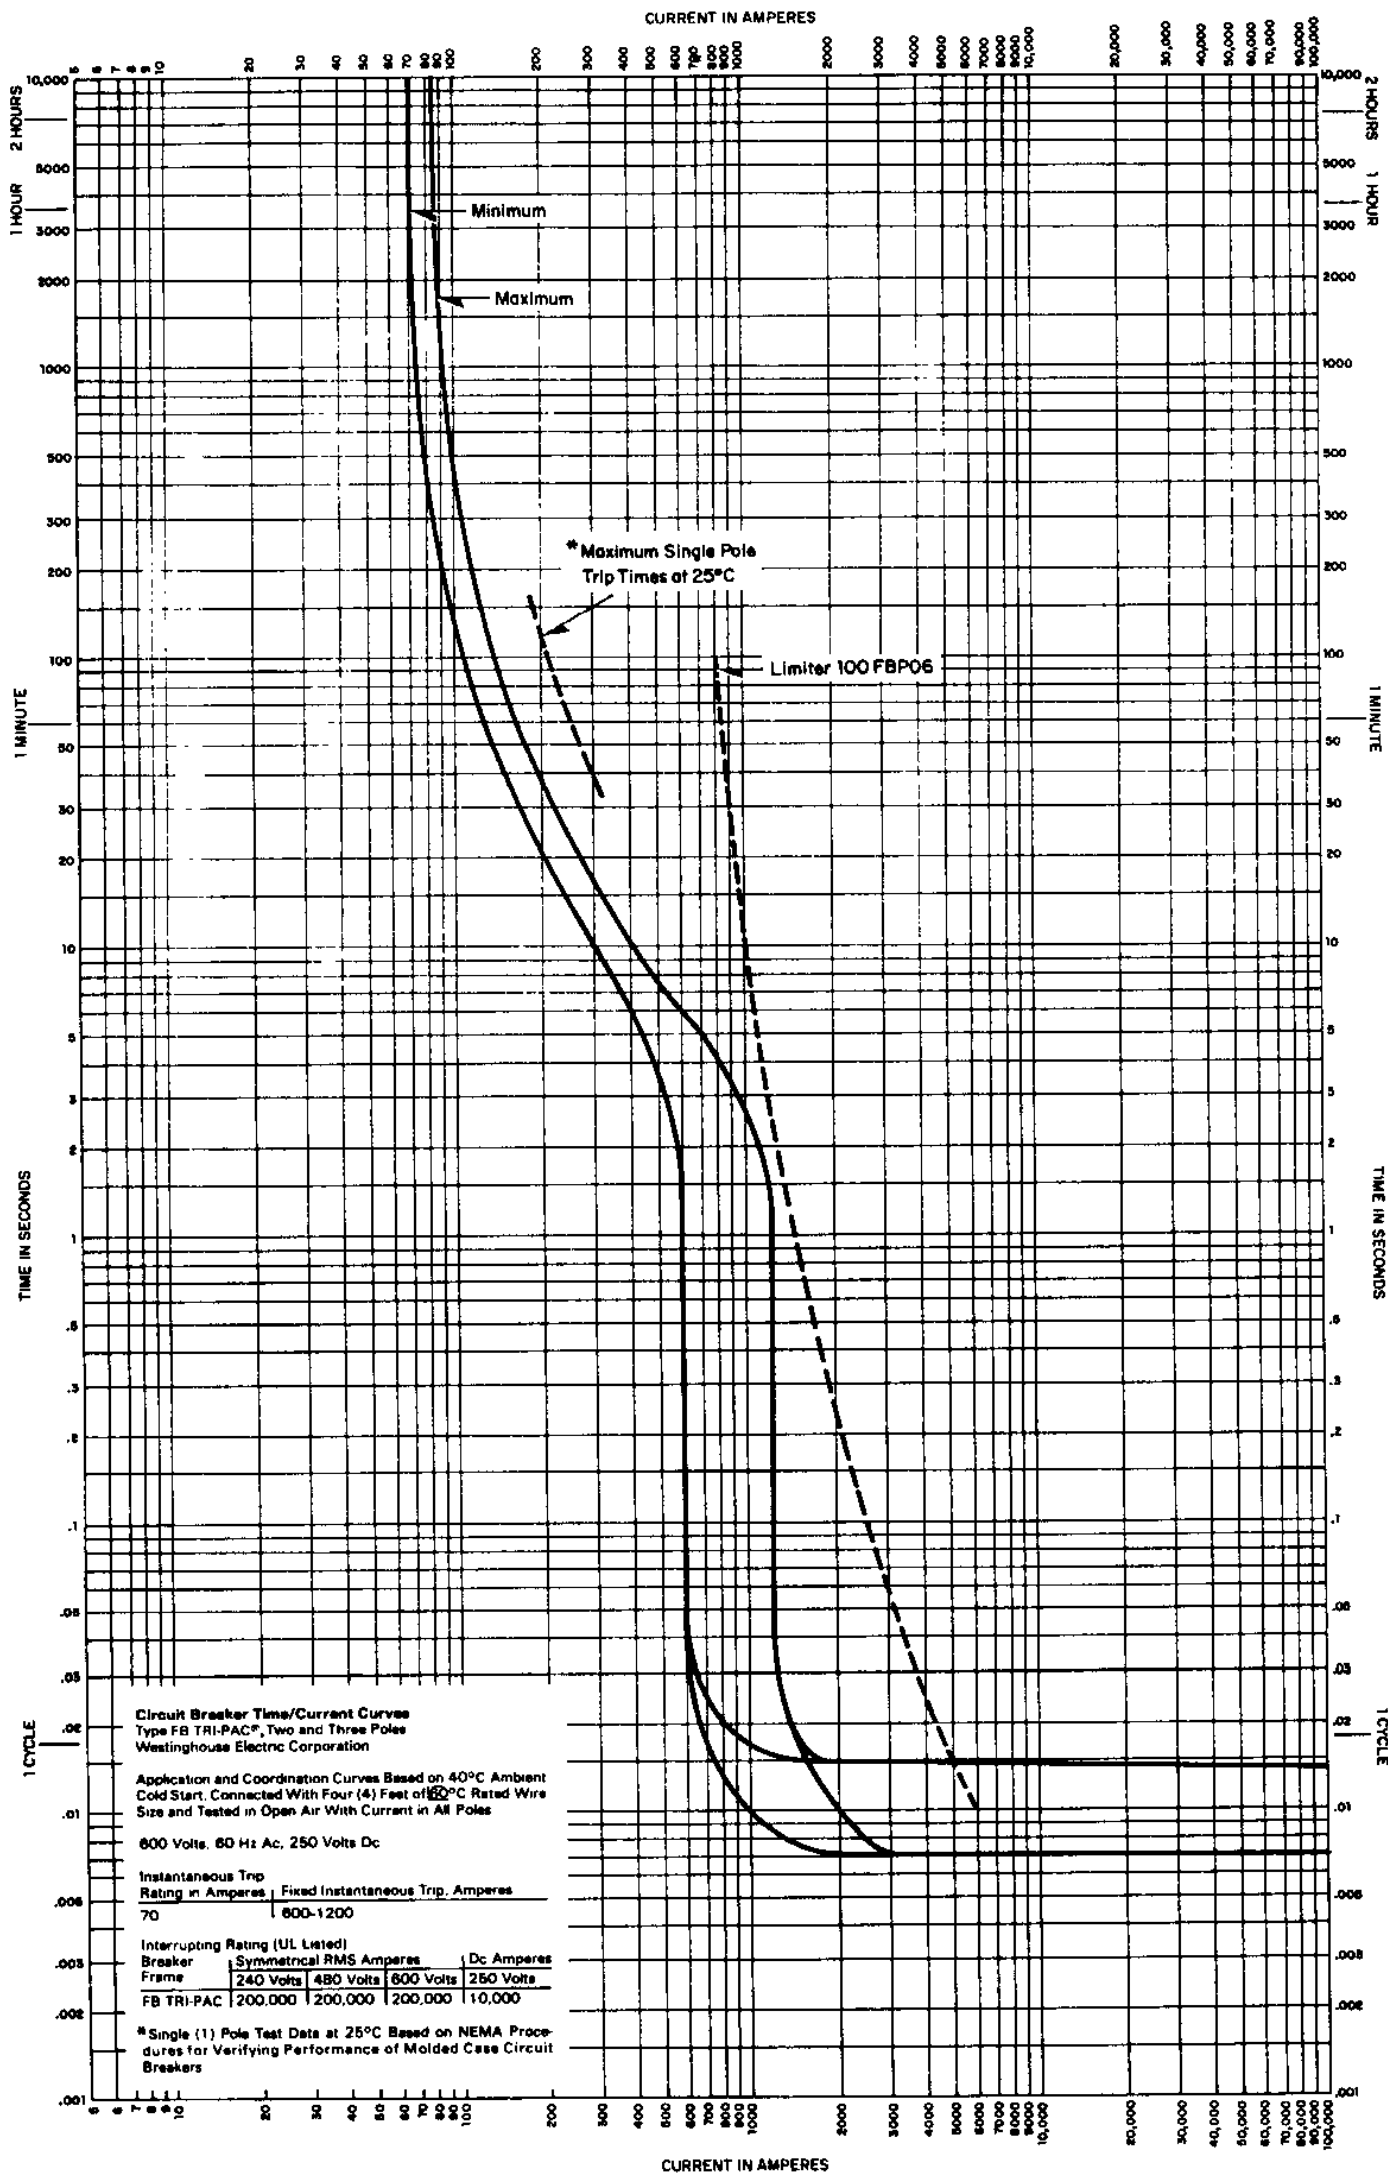

Westinghouse Electric Corporation
Low Voltage Breaker Division, Beaver, Pa.

Curve No. SC 3577-76
April, 1976