



SWITCHGEAR DEVICES

LOW VOLTAGE AIR CIRCUIT BREAKERS

TYPE DB-15 • DE-10N® • DEAD FRONT

DIMENSION SHEET


35-210

PAGE 1


2 OR 3 POLES

MANUALLY OR ELECTRICALLY OPERATED


Dimensions are approximate only. Do not use for construction purposes.

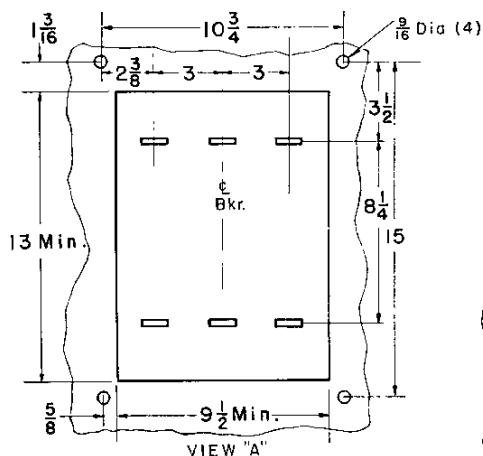

Front view of stud locations, cutout and drilling for mounting 3-pole breaker or 2-pole breaker without reverse current trip.




Cutout in dead front door or cover.

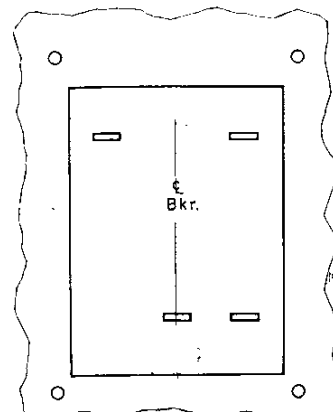

VIEW "C"

Front view of stud location, cutout and drilling for mounting 2-pole breaker with 2 over-current trips and reverse current trip (for dims. see View "A").

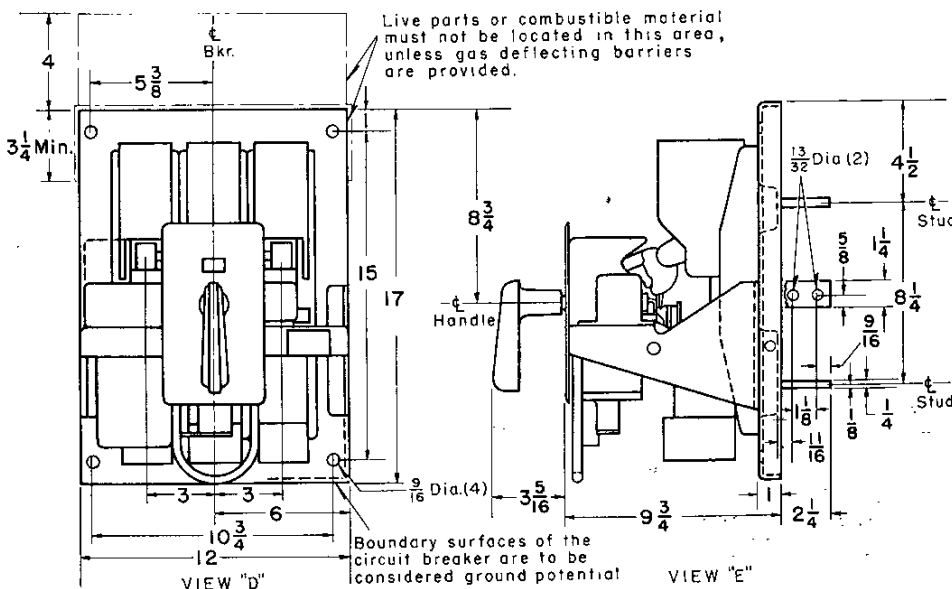

3-pole breaker without reverse current trip, or 2-pole breaker with or without reverse current trip.

SWITCHGEAR DEVICES

LOW VOLTAGE AIR CIRCUIT BREAKERS



TYPE DB-15 • DE-ION® • VENTILATED OR DUST-TIGHT



2 OR 3 POLES

MANUALLY OR ELECTRICALLY OPERATED

Dimensions are approximate only. Do not use for construction purposes.

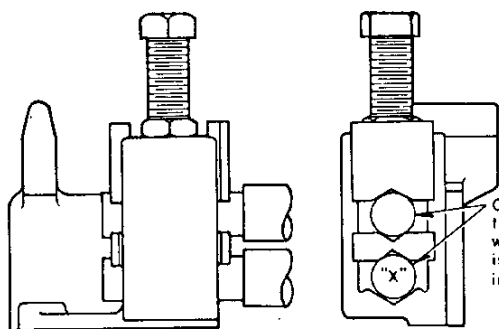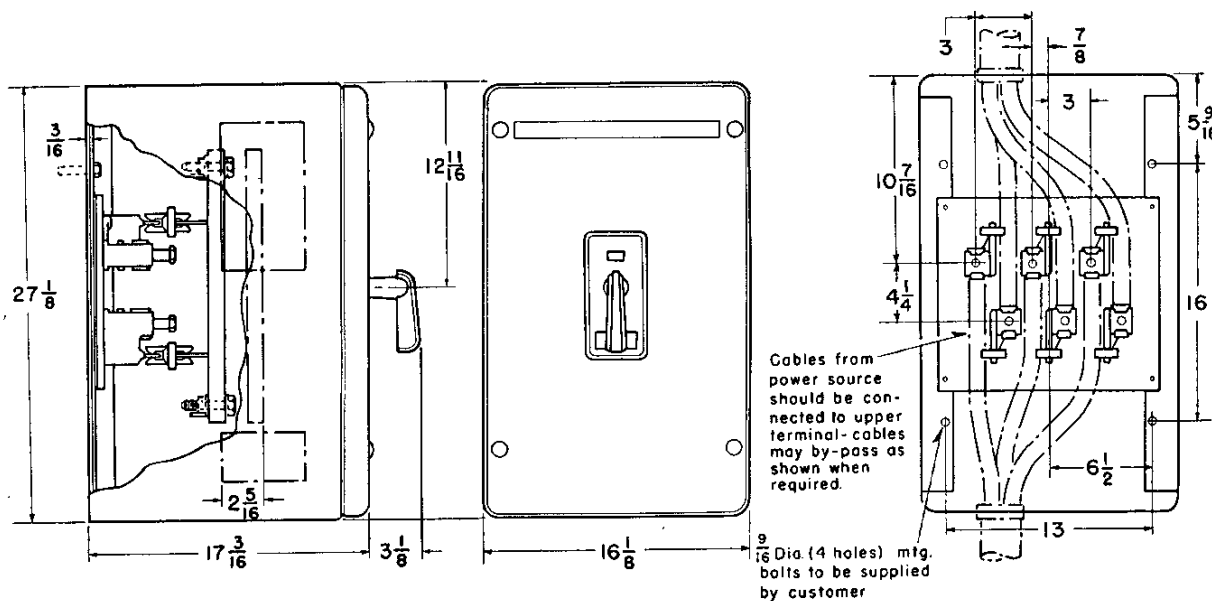

CLAMP TYPE TERMINAL
Cable range from one or two
#14 to 350 MCM or one 750 MCM

Customer's cable-
two cables shown-
when single cable
is used, insert cable
in position "X".

Knockouts
 $4\frac{5}{8} \times 3\frac{5}{8} \times 3$ Dia.
top and bottom

Knockouts
 $1\frac{3}{32} \times 1\frac{23}{64} \times 1\frac{23}{32}$ Dia.
top and bottom



SWITCHGEAR DEVICES

LOW VOLTAGE AIR CIRCUIT BREAKERS

TYPE DB-15 • DE-ION® • WEATHERPROOF

DIMENSION SHEET


35-210

PAGE 3

2 OR 3 POLES

MANUALLY OR ELECTRICALLY OPERATED

Dimensions are approximate only. Do not use for construction purposes.

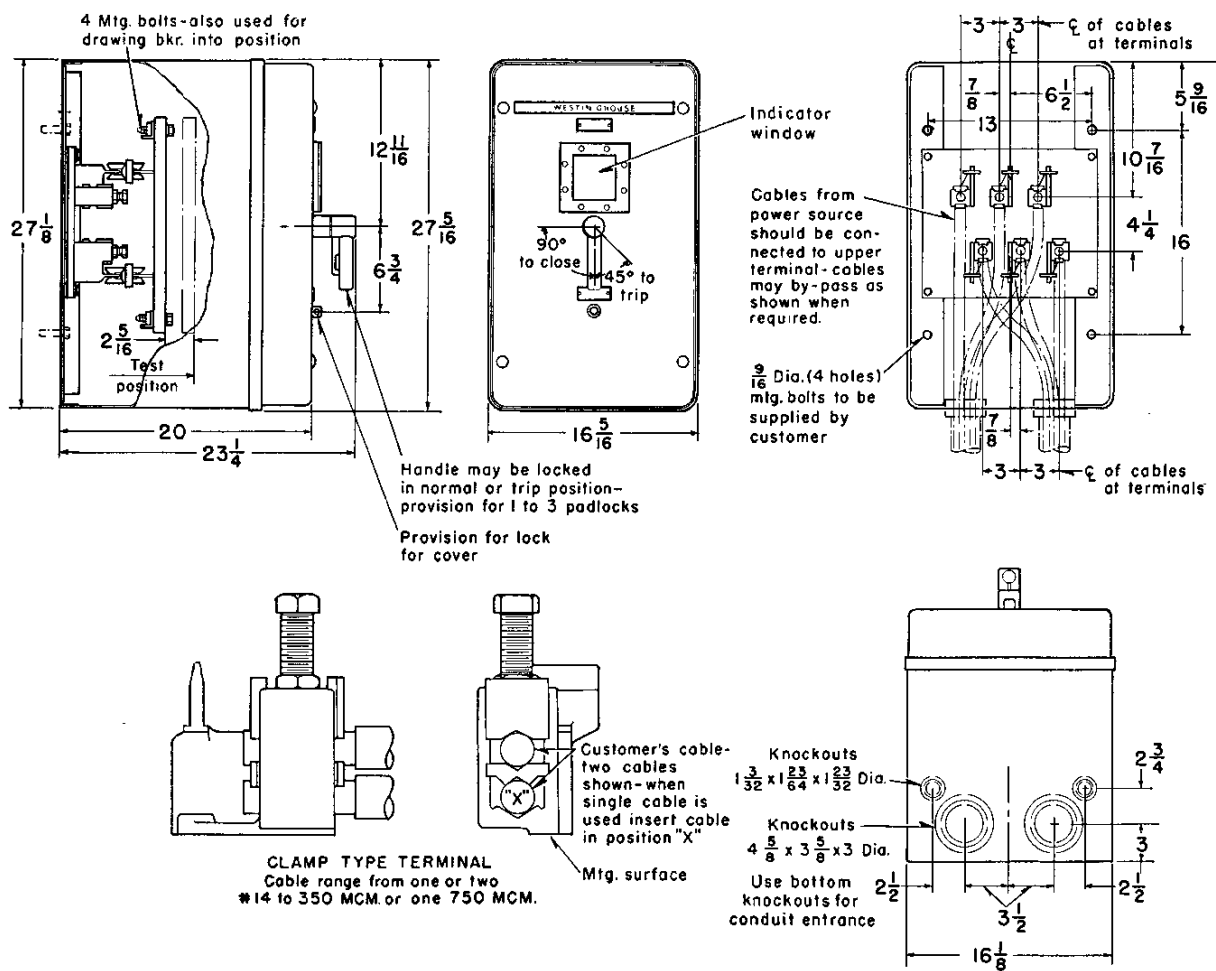

SWITCHGEAR DEVICES

LOW VOLTAGE AIR CIRCUIT BREAKERS


TYPE DB-15 • DE-ION® • SUBMERSIBLE



2 OR 3 POLES

MANUALLY OR ELECTRICALLY OPERATED

Dimensions are approximate only. Do not use for construction purposes.

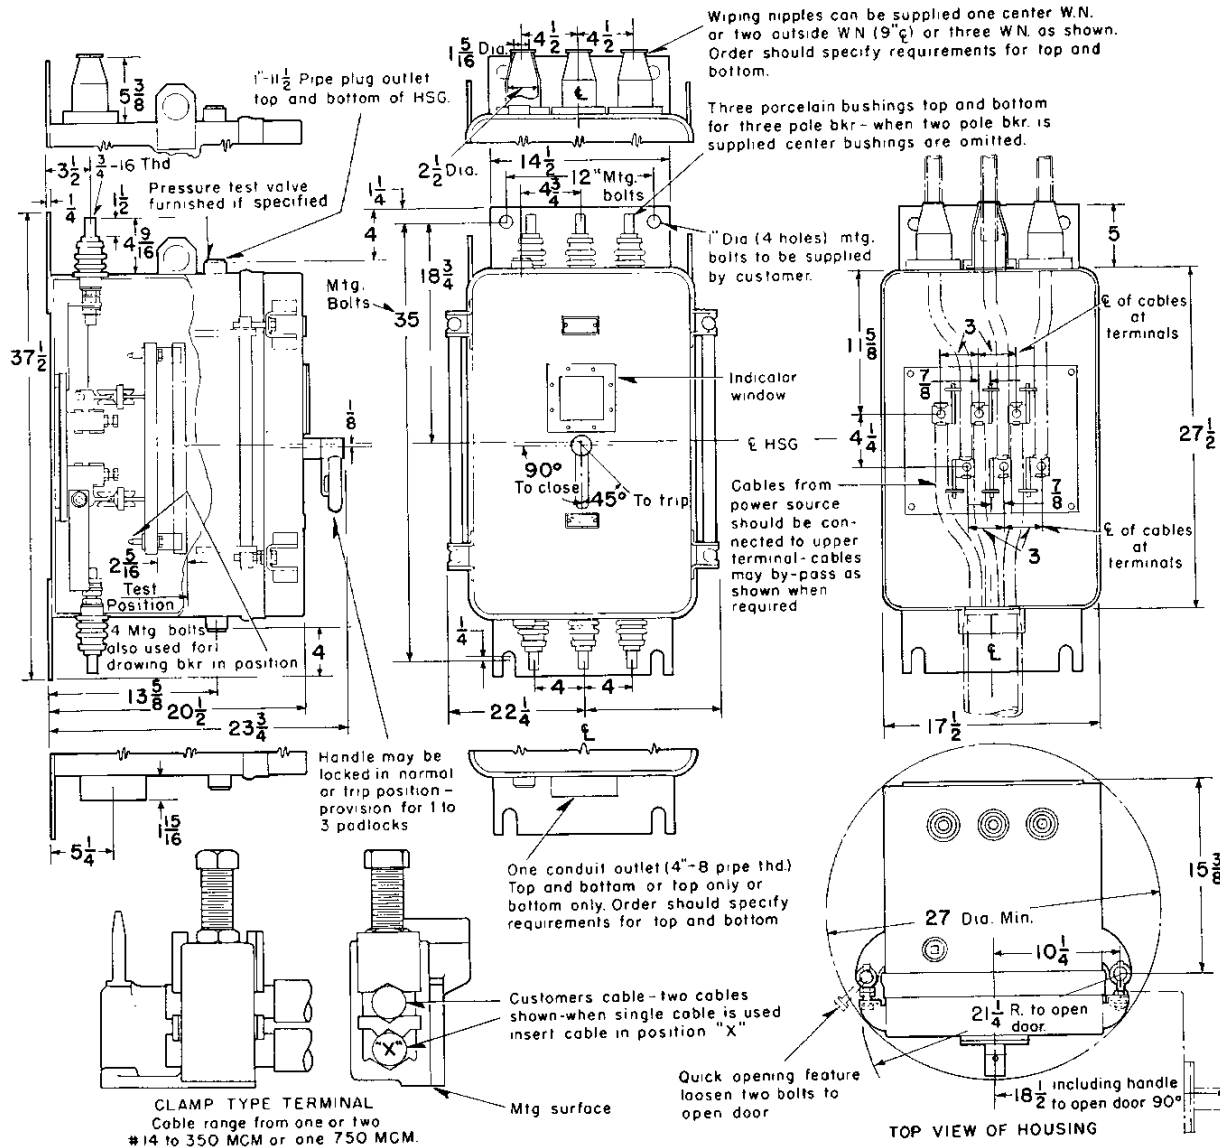

WESTINGHOUSE ELECTRIC CORPORATION
EAST PITTSBURGH PLANT • SWITCHGEAR DIVISION • EAST PITTSBURGH, PA.

Printed in U.S.A.