




SWITCHGEAR DEVICES **LOW VOLTAGE AIR CIRCUIT BREAKERS** **TYPE DB-25 • DE-ION® • DEAD FRONT**

DIMENSION SHEET


35-220

2 OR 3 POLES • MANUALLY OR ELECTRICALLY OPERATED


Dimensions are approximate only. Do not use for construction purposes.

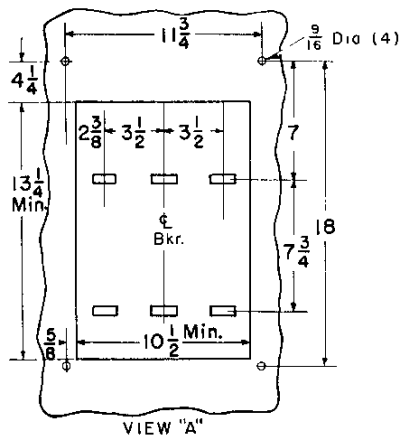


Front view of stud locations, cutout and drilling for mounting 3-pole breaker or 2-pole breaker without reverse current trip.

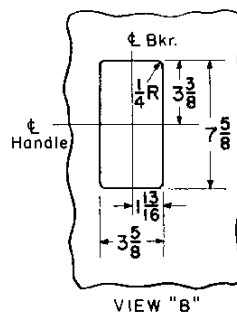

VIEW "B"
Cutout in dead front door or cover.

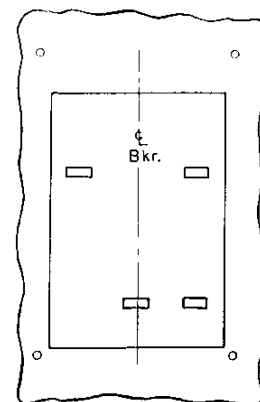

Front view of stud location, cutout and drilling for mounting 2-pole breaker with 2 over-current trips and reverse current trip. (for dims. see View "A").

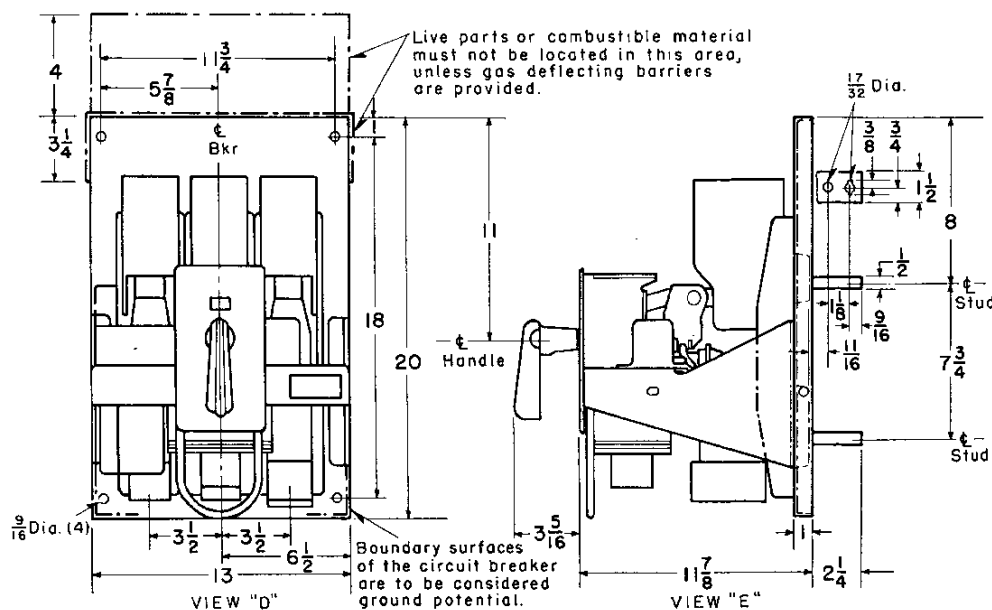

3-pole breaker without reverse current trip, or 2-pole breaker with or without reverse current trip.



SWITCHGEAR DEVICES LOW VOLTAGE AIR CIRCUIT BREAKERS TYPE DB-25 • DE-ION® • VENTILATED OR DUST-TIGHT




2 OR 3 POLES

MANUALLY OR ELECTRICALLY OPERATED

Dimensions are approximate only. Do not use for construction purposes.

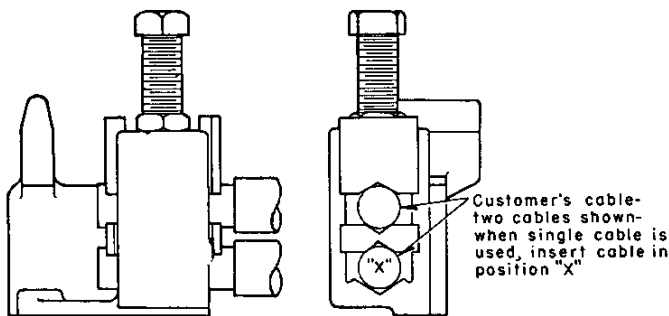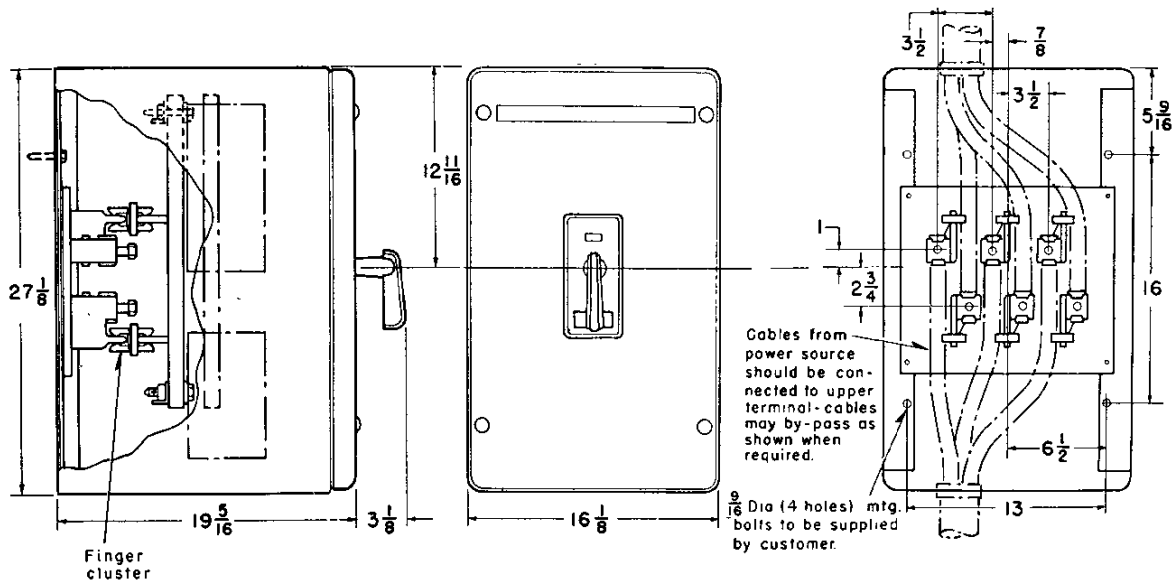

CLAMP TYPE TERMINAL
Cable range from one or two #14 to 350 MCM or one 750 MCM

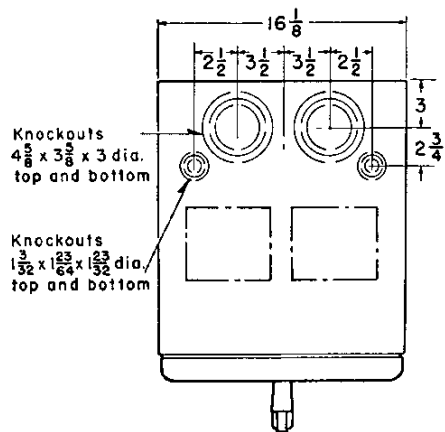



SWITCHGEAR DEVICES

LOW VOLTAGE AIR CIRCUIT BREAKERS

TYPE DB-25 • DE-ION® • WEATHERPROOF


DIMENSION SHEET

35-220

2 OR 3 POLES

MANUALLY OR ELECTRICALLY OPERATED

Dimensions are approximate only. Do not use for construction purposes.

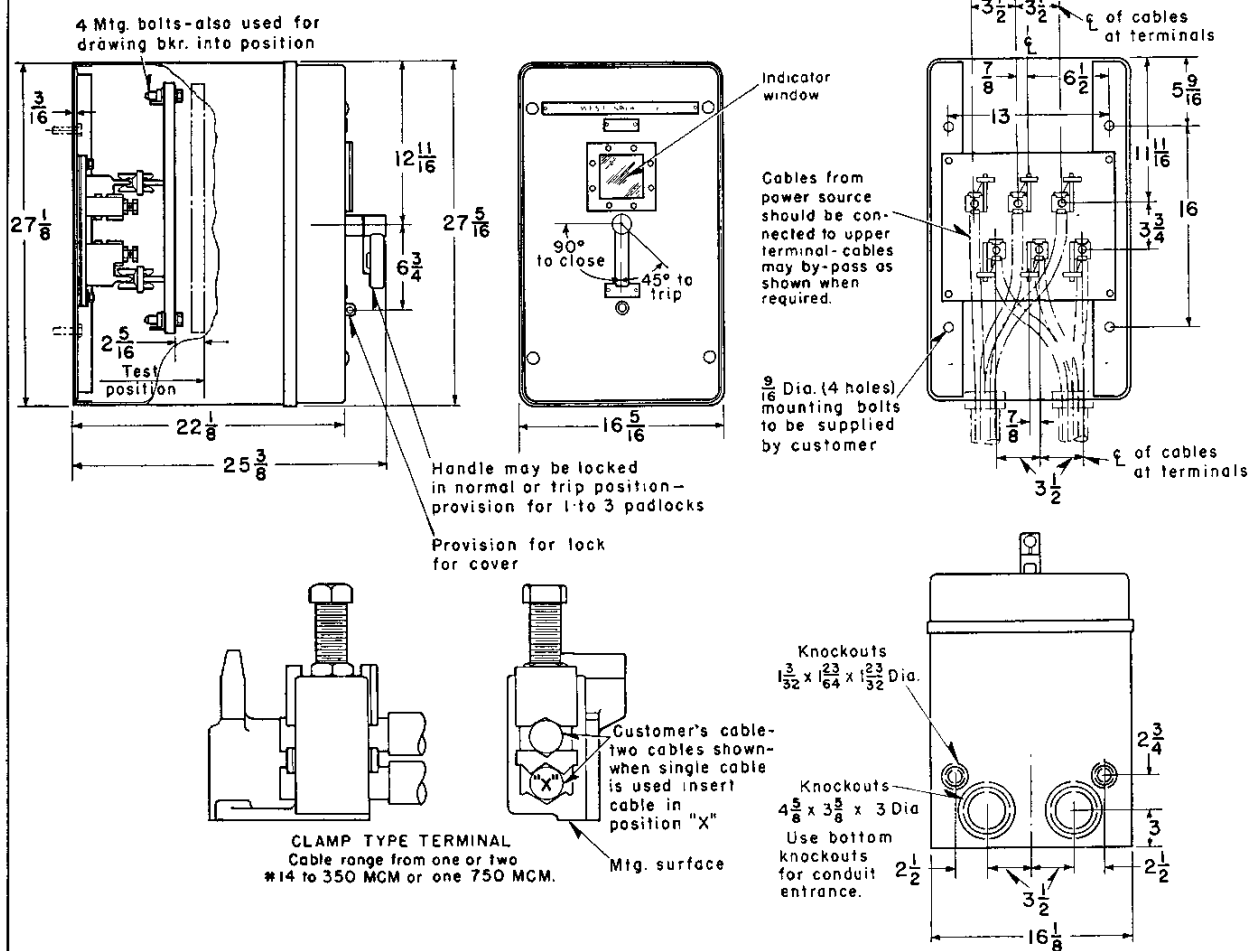

SWITCHGEAR DEVICES
LOW VOLTAGE AIR CIRCUIT BREAKERS
TYPE DB-25 • DE-10N® • SUBMERSIBLE



2 OR 3 POLES

MANUALLY OR ELECTRICALLY OPERATED

Wiping nipples can be supplied one center W.N. or two outside W.N. (9' c) or three W.N. as shown. Order should specify requirements for top and bottom.

Three porcelain bushings top and bottom for three pole bkr.-when two pole bkr. is supplied center bushings are omitted.

Pressure test valve furnished if specified

1" Dia. (4 holes) mtg. bolts to be supplied by customer.

Indicator window

90° To close 45° To trip

Cables from power source should be connected to upper terminal- cables may by-pass as shown when required.

Handle may be locked in normal or trip position- provision for 1 to 3 padlocks.

One conduit outlet (4"-8 pipe thd.) Top and bottom or top only or bottom only. Order should specify requirements for top and bottom.

Customers cable-two cables shown-when single cable is used insert cable in position "X".

Quick opening feature loosen two balls to open door

**CLAMP TYPE TERMINAL
Cable range from one or two #14 to 350 MCM. or one 750 MCM.**

TOP VIEW OF HOUSING

Dimensions:

- Top View: 22 1/4" x 17 1/2"
- Front View: 37 1/2" height, 22 5/8" width at base, 25 7/8" width at handle.
- Side View: 11 7/8" depth, 17 1/2" width at base.
- Terminal Spacing: 3 1/2" between terminals.
- Mounting Hole Diameter: 1 1/16" Dia.
- Mounting Bolt Diameter: 1/2" Dia.
- Conduit Outlet: 4 1/2" Dia.
- Door Opening: 21 1/4" R. to open door.
- Overall Height: 18 1/2" including handle.

WESTINGHOUSE ELECTRIC CORPORATION
EAST PITTSBURGH PLANT • SWITCHGEAR DIVISION • EAST PITTSBURGH, PA.

Printed in U.S.A.