




RENEWAL PARTS

GEF-4705

**POWER/VAC® VACUUM CIRCUIT BREAKER
WITH ML-17 MECHANISM
TYPE VB 4.16 250 - 1200A
THROUGH 13.8 1000 - 3000A**

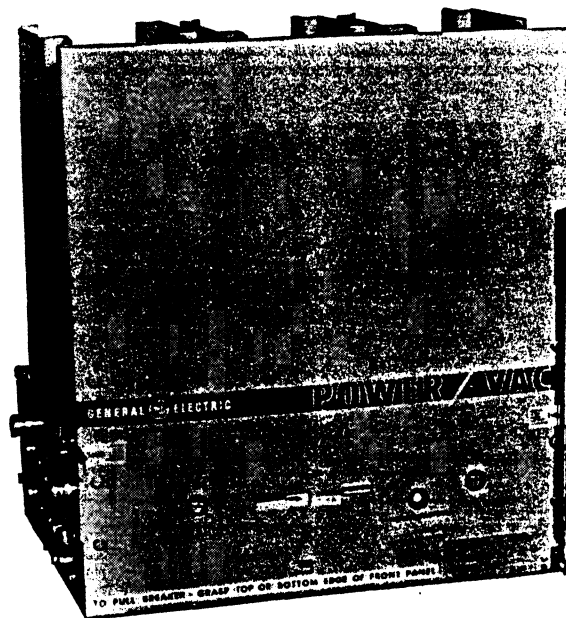


ORDERING INSTRUCTIONS

1. Always specify complete nameplate data of the breaker.
2. Specify the quantity, catalog number and reference number (if listed), description and this brochure number.
3. Standard hardware -- such as screws, bolts, nuts, washers etc. -- is not listed in this brochure. These items should be purchased locally.
4. For prices, refer to the nearest office of the General Electric Company.
5. For instructions/recommended maintenance, refer to GEK-39671.

MEDIUM VOLTAGE SWITCHGEAR BUSINESS SECTION
P.O. BOX 488
BURLINGTON, IOWA 52601
4/83 (5M)

GENERAL  ELECTRIC

FRONT VIEWS

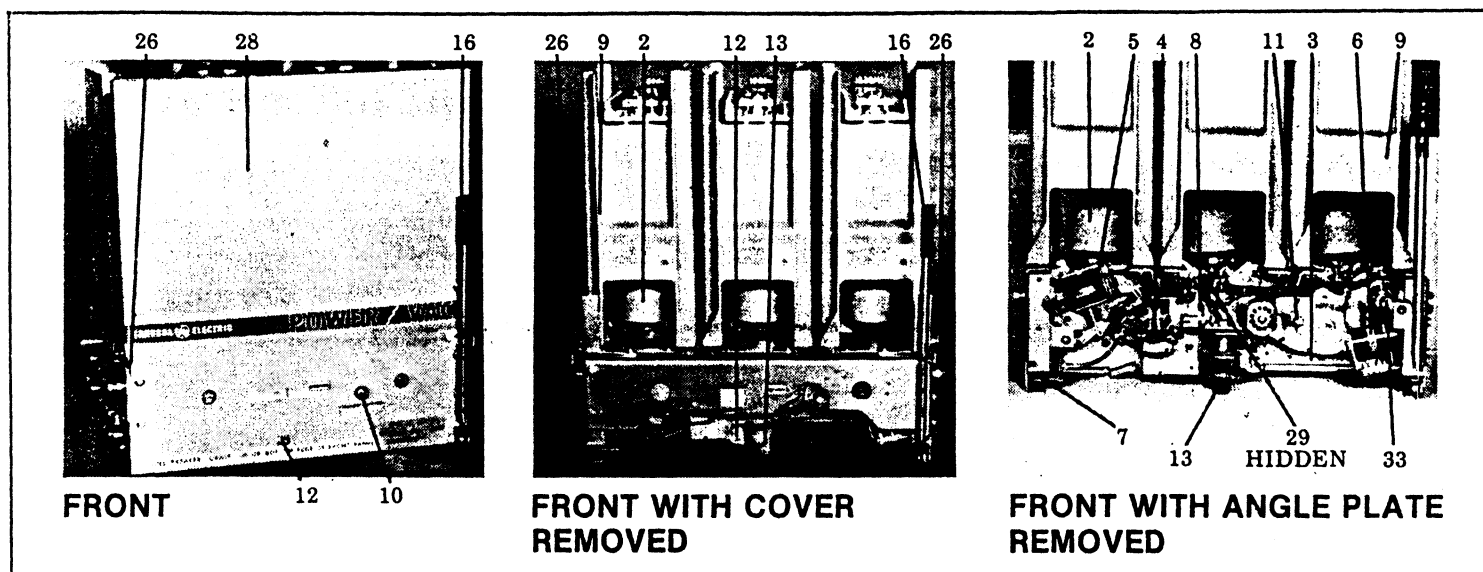

RECOMMENDED RENEWAL PARTS

REFERENCE NUMBER	DESCRIPTION	CATALOG NUMBER	MODEL DESIGNATOR	QUANTITY PER BREAKER
1	Primary Disconnect Contact Assembly	1200A	0, 1, 2, 3	6
		1200A		
		2000A		
		1200A		
		3000A		
		12/2000A		
2	Operating Rod	0209B3401G001	0, 1, 2, 3	3
3	Spring-Charging Motor	48 V-DC	0, 1, 2	1
		125 V-DC & 120 V-AC		
		250 V-DC & 240 V-AC		
		48 V-DC	3	1
		125 V-DC & 120 V-AC		
		250 V-DC & 240 V-AC		
4	Relay (Non-Nuclear)	48 V-DC	0, 1, 2, 3	1
		125 V-DC		
		250 V-DC		
		120 V - 60 Hz		
		240 V - 60 Hz		
		120 V - 50 Hz		
	Relay (Nuclear Only)	240 V - 50 Hz	0, 1, 2, 3	1
		48 V-DC		
		125 V-DC		
		250 V-DC		
		120 V - 60 Hz		
		240 V - 60 Hz		
		120 V - 50 Hz		
		240 V - 50 Hz		