


INPUT 480 VOLT DELTA 3Ø 60 HZ 3 WIRE

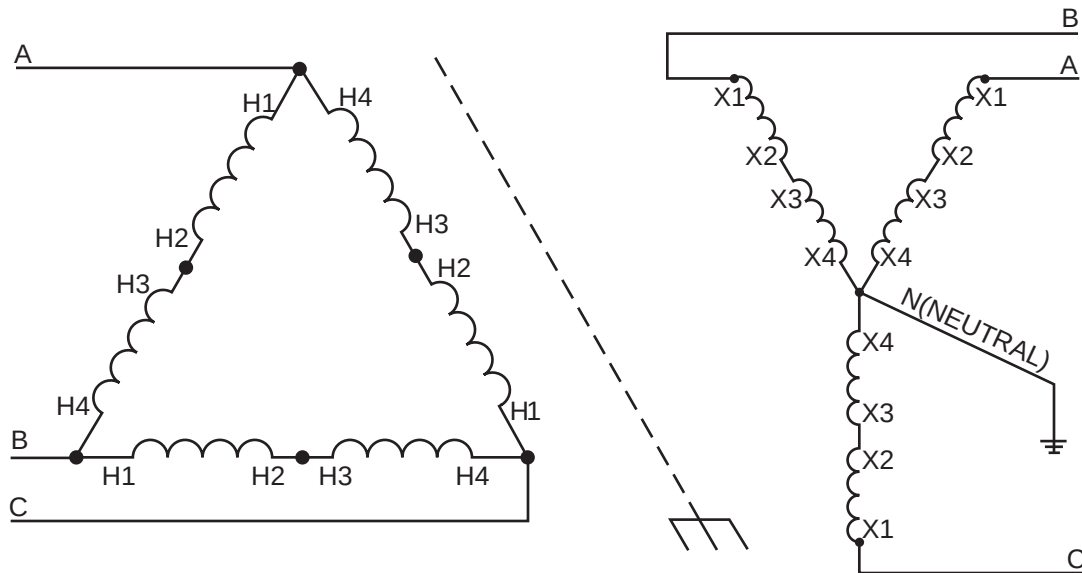

OUTPUT 416Y/240 VOLTS 3Ø 60 HZ 4 WIRE

CATALOG NO.	1Ø KVA	3Ø KVA	QTY.
* T-1-53004	.050	.150	3
* T-1-53005	.100	.300	3
* T-1-53006	.150	.450	3
* T-2-53007-S	.250	.750	3
* T-2-53008-S	.500	1.5	3
* T-2-53009-S	.750	2.25	3
T-2-53010-S	1	3	3
T-2-53011-S	1.5	4.5	3
T-2-53012-S	2	6	3
T-2-53013-S	3	9	3
T-2-53014-S	5	15	3

* MAY BE USED ON 50 OR 60 HZ

NOTE: 3 KVA 3Ø AND LARGER MAY BE REVERSE CONNECTED.
.750 KVA 3Ø AND LARGER ARE SHIELDED.



**Acme Electric
Corporation**

Power Distribution Products Division

4815 West Fifth Street
Lumberton, NC 28358
910-738-1121 Inside NC
800-334-5214 Outside NC
910-739-0024 Fax
www.acmepowerdist.com

A-125875